ISSN # 0748-9331

THE COMPUTER JOURNAL®

For Those Who Interface, Build, and Apply Micros

Issue Number 17 $2.50 US

Poor Man's Distributed Processing;
Cross Development
and Using the H-8 as a Print Buffer page 5

BASE:
Part Five in a Series on
How to Design and Write Your Own Database page 12

FAX-64;
Facsimile Pictures on a Micro page 16

The Computer Corner page 27

Interfacing Tips and Troubles:
Memory Mapped I/O on the Sinclair ZX81 page 28

THE COMPUTER JOURNAL
P.O. Box 1697
Kalispell, Montana 59903
406-257-9119

Editor/Publisher
Art Carlson

Art Director
Joan Thompson

Art Assistant
Lois Cawrse

Production Assistant
Judie Overbeek

Circulation
Donna Carlson

Contributing Editor
Ernie Brooner

Contributing Editor
Neil Bungard

Technical Editor
Lance Rose

The Computer Journal® is a monthly magazine for those who interface, build, and apply microcomputers.

The subscription rate for twelve issues is $24 in the U.S., $30 in Canada, and $48 airmail in other countries. Please make payment in U.S. funds.

Entire contents copyright © 1985 by The Computer Journal.

Advertising rates available upon request.

To indicate a change of address, please send your old label and new address.

Postmaster: Send address changes to: The Computer Journal, P.O. Box 1697, Kalispell, Montana, 59903-1697.

Address all editorial, advertising and subscription inquiries to: The Computer Journal, P.O. Box 1697, Kalispell, MT 59901

Editor's Page

How Much Computer Do You Need?

I was recently asked "What computer should I buy?" and of course, my answer was "What do you want to do with it?" This lead to a long discussion and some time spent looking through the many pages of advertising in *Byte* and *The Computer Shopper*. We ended up overwhelmed by the number of choices available in today's market. When I bought my first computer the choice was between Commodore, Radio Shack, Apple, or CP/M, but today there are so many products on the market that it is no longer that simple.

When choosing a computer you should first select the software you need, and then get the system which runs that software. A survey of the current software showed that there were more new programs being released for the IBM-PC and its compatibles than for any other system. In fact, there are probably more releases for the IBM-PC than for all the other systems combined! This means that I'll have to recommend the PC or one of its clones for a non-technical user in a normal business office environment, based on the large number of available programs, user's support, and the general needs of an unsophisticed user.

Helping someone else select a system forced me to think about defining what a computer is, and how much computer is really needed. The usual reaction is to attempt to get one system that is powerful enough to fill all our needs, but the complexity and awkwardness of the system increases rapidly with size, and it can be very dificult to perform simple functions with a large system. There will never be the one "perfect computer" which satisfies all needs for everyone, because we each have different needs. In fact, I'll never be satisfied with just one computer because I have a wide range of applications. Besides, two smaller systems enable me to run two entirely different types of operations at the same time, and will probably cost less than one larger multitasking unit.

A better choice is to define the requirements on as low a level as possible, and then combine these requirements into similar groups in order to determine what type of system or systems are required. Some of us are computer nuts who would like to have one of everything to play with, but the limited funds available for computers force us to take a more realistic view of our needs.

"There will never be the one 'perfect computer' which satisfies all needs for everyone..."

My uses can be roughly divided into two areas, which are the business of running this magazine, and personal projects, with a lot of overlap since the magazine is about computers. The business applications include word-processing and phototypesetting from disk to produce the copy, a data base for maintaining subscription records and mailing lists, and a spreadsheet for financial forecasting. These needs can be served by either the original Apple II + I started with, or the two S-100 Z-80 systems running CP/M. I prefer the CP/M systems for the business because of the higher capacity 8" disks, the software, and the operating system.

My personal projects involve general hardware and software hacking, lear-

FOR TRS-80 MODELS 1, 3 & 4
IBM PC, XT, AND COMPAQ

COMMERCIAL SOFTWARE DEVELOPERS and INDIVIDUAL PROGRAMMERS

appreciate MMSFORTH for its:

- Power
- Flexibility
- Compactness
- Development speed
- Execution speed
- Maintainability.

When you want to create the ultimate:

- Computer Language
- Application
- Operating System
- Utility,

BUILD IT in MMSFORTH

(Unless we have it ready for you now!)

Bulk Distribution Licensing @ $500 for 50 units, or as little as pennies each in large quantities. (Corporate Site License required.)

The total software environment for IBM PC, TRS-80 Model 1, 3, 4 and close friends.

- Personal License (required):
  - MMSFORTH System Disk (IBM PC) $249.95
  - MMSFORTH System Disk (TRS-80 1, 3 or 4) 129.95
- Personal License (optional modules):
  - FORTHCOM communications module . . . . $ 39.95
  - UTILITIES 39.95
  - GAMES 39.95
  - EXPERT-2 expert system 69.95
  - DATAHANDLER 89.95
  - DATAHANDLER-PLUS (PC only, 128K req.) 99.95
  - FORTHWRITE word processor 175.00
- Corporate Site License Extensions . . . . . from $1,000
- Some recommended Forth books:
  - UNDERSTANDING FORTH (overview) . . . $ 2.95
  - STARTING FORTH (programming) 16.95
  - THINKING FORTH (technique) 15.95
  - BEGINNING FORTH (re MMSFORTH) . . . 16.95

Shipping/handling & tax extra. No returns on software.

Ask your dealer to show you the world of MMSFORTH, or request our free brochure.

MILLER MICROCOMPUTER SERVICES
61 Lake Shore Road, Natick, MA 01760
(617) 653-6136

ning additional languages and improving my programming skills, and applying computers for the measurement and control of real world devices. Most of my time has been spent on the magazine, so I haven't been able to do much with my personal projects, but I want to automate my lathe, build a remote weather station, monitor and control a solar heating system, and experiment with robotics. For this I need an open system with good I/O capabilites, an accessible bus, and a flexible operating system. Both the Apple and the CP/M systems work well here, and it is difficult to choose betwen them. The Apple has the advantage of having BASIC and a reasonably decent monitor in ROM, high resolution graphics, good low-cost assemblers, and reasonably priced cards for A/D and interfacing. The S-100 CP/M system has a better selection of languages, high capacity disks, a more powerful and flexible operating system, and better I/O capabilities, but interfacing cards are more expensive. I intend to continue working with both systems for program development, and then will use SBC's (such as Davidge) and microcontrollers (such as Basicon) for dedicated controllers.

What Can You Do With An Old Computer?

When you finally decide to get a newer, more powerful computer you are faced with the problem of deciding what to do with the old one. Because of the rapid advances, it isn't worth much on the used computer market if it is more than two or three years old, and yet it is still working and too good to throw away. One answer is to use it to relieve your main system from some low-level, time consuming operations, such as the print spooler described in Piotrowski's article on "Poor Man's Distributed Processing" in this issue.

I'm satisfied with my two eight bit systems for now because I still have a lot to learn, but I would like to upgrade to a 68000 16 bit system in the future—not because I need it, but just for the challenge of new things. One of the things that I really like about the S-100 system is that I can experiment with the 68000 by building the 68008 board described in Kohler's article in the last issue without replacing the whole system.

Right now I have absolutely no desire for an IBM-PC or one of its clones, but I think that their bringing out the PC was of great benefit to hardware hackers. Not that we'll buy their computers, but rather that all the non-technical users are flocking to the IBM-PC standard and dumping non-conforming equipment on the market at fire sale prices! It enables us to pick up great used equipment for very little cost (watch for Kibler's article on his $500 Superbrain in the next issue). You'll have to be able to help yourself when working with this older equipment because the manufacturer will either be out of business or will refuse to support the obsolete equipment. That's one of the purposes of this magazine—to help you learn to use an assembler and a debugger to patch the operating system, and to provide the means for you to contact others who have experience or documentation for the older systems. This is your magazine . . . use it!

A New Look For The Journal

This is our second issue with our new three column format. We made this change for easier readability, to improve the layout with larger illustrations and program listings, and to provide for 1/9th page ads. In addition to the smaller ads, we are also adding classified ads in order to help individuals and smaller companies reach their markets and to make new developments in specialized fields available to our readers. The classified ads are 25 cents per word, paid in advance, and can be charged to your Visa or Master Charge, but we prefer not to take these ads over the phone because of the chance for errors.

Information Is For Sharing

The most important function of a journal is to provide a place for you to share your thoughts, ideas, problems, and solutions. We need your articles, letters, and comments. If you disagree with one of our authors, tell us. If you can expand on something we publish, tell us. If you need the answer to a problem, tell us. What you send doesn't have to be formal or fancy, just get us the information so that we can share it with others. ■

Letters From Our Readers

Dear Computer Journal:

I'm writing in response to the article "The State of the Industry," by Bill Kibler in Issue 15 of *The Computer Journal*. While Kibler has some good things to say, there are also some points I disagree with, primarily dealing with his adamant dislike for the IBM PC. While I realize the IBM PC has several shortcomings for us ideal-computer lovers, I also believe IBM has done much more good than harm to the microcomputer industry.

When IBM introduced their PC "...not compatible with anything" as Kibler puts it, I don't think it was quite the joke that Kibler seems to think it was. Although it is impossible to know all of the reasons why IBM chose the architecture that it did (many were economical, to be sure), there were many **very good** reasons for deviating from what was already available at the time. Among them is the limited memory space permitted by the 8-bit CPUs common to most of the systems of that time. Using a CPU with the ablility to directly address up to one megabyte of main memory allows the PC to run many programs and hold a lot of data that would be impractical or impossible on the typical 8-bit CP/M machines common at the time (and still ubiquitous today).

The interrupt-oriented architecture, DMA capability and standardized hardware expansion slots (that is, its open system architecture) are other positive features of the IBM PC. The expansion slots are one of the most attractive features of the Apple II, in my opinion.

Above all else, IBM did something for the microcomputer industry that needed to be done: they created a standard. The few standards previously established, in particular the Apple II and CP/M, were not sufficient to meet the needs of many businesses and other users. IBM created a standard with an 80 column screen (I never could get used to Apple's 40 columns!), a (reasonably) good keyboard that includes lower case and special function keys, and an open system architecture that allows easy system expansion. IBM also set a standard for the 10 M-byte Winchester drive, helping drop hard-disk prices.

Don't get me wrong. I'm not blind to the shortcomings of the IBM PC. Indeed, I dislike the segmented architecture of the 8086 family (including the PC's 8088). Fortunately, the segmentation problem is transparent to the user in most of the good application software available for the PC. I wish to this day, however, that IBM would have chosen the far-better 68000 family. My opinion concerning the IBM PC family of computers is reflected in an editorial statement by Phil Lemmons, Editor in Chief at *Byte magazine*, in their **1984 Guide to the IBM Personal Computer:** "For the present, it makes more sense to enjoy the benefits of the current IBM standard than to curse it because it could be better. But enjoying the benefits of this standard shouldn't prevent us from keeping an eye open for something really new."

R.C.A.
Michigan

Dear Computer Journal:

Please find my check for a one year subscription enclosed. I would like to get a copy of the first two sections of your article "Write Your Own Threaded Language." Part three was in your sample copy and I enjoyed it very much. As an old hobbyist (circa 1972) I have become concerned that the hobby (computers) movement is being steamrollered by highly integrated technology on one side and suffocated by the tide of appliance computers on the other. Thus, I fully support your Journal. My interest currently is in the development of a 32 bit microprocessor based single board computer in the low cost style of the "Big Board" marketed by Digital Research of Texas. The board should have the capability of 4 megabytes of memory, floppy and hard disk peripherals, six to eight serial communication ports, and the same number of parallel ports. I feel that hobbyists need an architecture that is unique to their needs such as concurrency of tasks.

W.F.B.
Massachusetts

Dear Computer Journal:

Recently, I renewed my subscription to *The Computer Journal*. Due to a limited budget, both of money and of time, I try to limit my reading to those magazines that cover the technical aspects of computers. By profession I am a programmer; by avocation I enjoy working with the hardware of computers and electronics.

Recently it has been obvious that the magazine industry has gone on a binge of producing computer magazines aimed at the user only, indeed at the novice user, virtually ignoring the avid hobbyist or interested techie. This tendency has even led to the demise of *MicroSystems*, which had been my favorite magazine, and *Microcomputing* which had been reasonably good until it was 'conglomeratized'. Fortunately this trend should be self-correcting, and the disappearance of many of these new user magazines is already taking place. But in the meantime some good magazines are also being lost.

Some people are 'fighting back' by correctly pointing out that the real audience for computer mag's is the sophisticated user, builder, designer, etc.. The nearest analogy is that while almost everyone drives a car there are virtually no magazines that feature articles such as "The Correct Grip on the Steering Wheel," yet there do exist car magazines aimed at the truly interested car enthusiasts, and they survive even while appealing to only a fraction of the car driving public. In fact they survive only by appealing to a limited audience.

I think *The Computer Journal* is a good, even needed magazine, and I want to see it survive. But I think it needs to find its niche. While reviewing the previous year's issues I am struck by the wide range of articles, going all the way from the most basic (Database Design, for instance), to the esoteric ("Wire Wrap a 68008 CPU"). I am also struck by the thinness of the issues; the whole year takes up only as much shelf space as three issues of *Byte*. But thinness is relative – better to have a few good pages than a hundred meaningless ones. *(continued)*

One thing that I enjoyed in other magazines such as *MicroSystems* was product reviews, especially reviews of products offered as kits. Reviews of kits are helpful to those of us who like to build them and even to the increasingly limited number of suppliers. I like to read kit reviews since I can't build all the kits that are offered (many of them I might not use), and want to know about the ones I would like to build. Reviews and articles about kit building can't but aid the industry, even when they include justified criticism of a particular kit.

Very truly yours,
J.O.
Massachusetts

Dear Computer Journal:

Thank you for a terrific magazine! Just as two other publications, *Microsystems* and *Microcomputing*, disappeared over the horizon, *The Computer Journal* came into view. *Microsystems* was terrific, and so was *Microcomputing's* predecessor, *Kilobaud*. I will miss them. I think *The Computer Journal* will do better than just fill the void.

There is a small group of dedicated microcomputerists in the Los Angeles area called "The Southern California Digital Group Computer Society." We are concerned almost exclusively with the preservation, maintenance, and further development of original Digital Group systems. We address both hardware and software issues. At a recent meeting I spoke about your magazine and almost everyone indicated an interest in subscribing.

Software ranges from operating systems – CO/M, OASIS, [PHIMON, DISKMON, MOPS (native Digital Group op. sys.)], MCOS, and OPUS; to languages – BASIC, FORTRAN, C, FORTH, Assemblers of all sorts; and applications that run the gamut from terminal emulators to accounting systems and data base tools.

Hardware typically is dedicated to the SUDING bus as originally presented by The Digital Group, although there have been many successful adaptations of S-100, Apple and TRS80 components. Recent refinements include 4mhz Z-80 CPU with on-board clock and calendar (with battery for continuous power-off function) and "heart-beat" for interrupt driven multi-user operation with intelligent co-processors provide sophisticated I/O management, terminal emulation, 512K pseudo-disk functions and much more.

Current projects include design and development of multiple concurrent processors (they may be dis-similar) and the related software. The local group meets every two months. There is also a national newsletter. Anyone interested in Digital Group systems may contact me at the address below.

Sincerely,
Fred G. Sutton
Pres., SCDGCS
1230 S. Helberta Avenue
Redondo Beach, CA 90277

Dear Computer Journal:

I enjoyed your articles on "Controlling the Hayes Micromodem II From Assembly Language."

As a related question, I wonder what information is available on emulating block mode terminals. I realize that there are several different standards for block mode terminals, but there doesn't appear to be any block mode software available for the Apple II.

As a starting point I'd like to see some general information as to how the data and information codes are packed for transmission. Do you know where I could find some source material?

Sincerely,
F.K.
Los Angeles, CA

Ed: Readers, can you help?

Dear Neil Bungard:

This is to express appreciation for your trouble shooting/interfacing series in *The Computer Journal*. I have a file folder at least ¾" thick with references to trouble shooting techniques and circuits. It occurred to me that perhaps an annotated bibliography for *The Computer Journal* would be worthwhile. One particular device that I have wanted to build, but could never quite dope out from the printed material, was a test circuit described by Bob Cushman in *EDN* about five years ago, which originated with some Motorola engineers. It's essentially a method of looking at all data lines as latched at a given (thumb-switch selected) address. I have access to a fairly complete file of *Wireless World*, where a number of devices of varying complexity have been described.

I have looked, unsuccessfully, for a suitable circuit for a pulse injection probe with the versatility of the Hewlett Packard device, which senses whether a point is high or low, and pulses it in the appropriate direction. It is (as I recall) somewhat flexible in pulse duration. Any ideas?

Electronics (Australia) in December 1977, published full details on a 40 channel tester in which the condition of up to 40 points was latched and held, under control of a variable time-delayed strobe triggered from a reset (or other 'time zero') system reference. Thus the response of the 40 latched LEDs can be 'walked' through a total time excursion of several milliseconds as the time-delay controlling potentiometer is rotated and the timing sequence thus inferred. It looks as if that will be my next project.

Sincerely,
H.M.
Hinsdale, IL ■

NOW FOR XEROX 820
BB & BBII

LOW COST
DISK CONTROLLER

SAVE WEAR AND TEAR ON YOUR DISK DRIVES AND FLOPPIES WITH THE MODEL 300. ALL SOLID STATE RELAY, SMALL ENOUGH TO FIT EASILY INSIDE YOUR DISK DRIVE, THE 3601 CAN BE INSTALLED IN MINUTES. YOUR COMPUTER WILL THEN TURN YOUR DRIVES ON AND OFF AUTOMATICALLY AS THEY ARE NEEDED.

- FEATURES -

- SMALL SIZE - 1.75 X 1.40 X 0.35
- FAST INSTALLATION - DIAGRAM INCLUDED
- ZERO CROSSING - ELIMINATES ALL SWITCHING NOISE
- TRIAC OUTPUT - NO MECHANICAL PARTS
- DVDT FILTER - INCLUDED
- LOW COST - ONLY $8.80 EACH
- 1 YEAR WARRANTY
- 30 DAY MONEY BACK GUARANTEE

PHENIX
COMPANY OF CALIFORNIA
1619 SOUTH MINNIE STREET
SANTA ANA CALIFORNIA 92707

(714) 547-4316

CALIF. RES. ADD 6% SALES TAX
ADD $1.00 EA. POSTAGE & HANDLING

PLEASE SPECIFY BB1, BB11 OR XEROX
*NOTE: XEROX 820 REQUIRES ONE RELAY PER DISK DRIVE

POOR MAN'S DISTRIBUTED PROCESSING:

Cross Development and Using the H-8 as a Print Buffer

by Walt Piotrowski

I wonder how many computers there are in the world that still compute but have been taken out of service because their owners' needs have changed? There are the starter machines which were intended to be outgrown (although their purchasers may not have known that), and there are a growing number of very capable machines that have been replaced because of advances in technology. At the same time, there are a number of things around the house, or the company, that could be done quite well by a computer but are not being done because the newer models are too expensive or powerful to dedicate to these tasks. Energy control and security come to mind fairly quickly. An old computer can also be put to use as a smart peripheral or a data preprocessor for a newer machine. You could, for example, build real world interfaces for the old machine that might void the warranty on your newer machine and then transfer the data between the old one and the new one using a commercially available interface. You could also help advance the state of the art yourself by experimenting with loosely coupled distributed processing.

The old machine that you put to use in this way does not have to be a complete system. It is common to develop software on a fully equipped system and then use that software on another system that does not have a full complement of peripherals. It's regularly done in the commercial and military worlds (automobiles and missiles both have computers in them) and it can also be done by an individual if he's willing to substitute some ingenuity for expensive test setups. This article contains a general discussion of the principles of cross development and then shows their application in the development of a printer buffer using a Heathkit H-8 that had no peripherals of its own.

Cross Development

There are two major processes in software development that actually make use of a computer. The first is code generation. Code generation uses an editor for entry of source statements, an assembler or compiler for translation of source statements to an intermediate object code, and a linker or loader for generation of the final object code. The second process is code testing and, for the kind of program that we are considering here, usually requires additional debug aids of some kind.

The two computers involved in a cross development are called the host and the target. The host is sometimes called the development system and it usually has a disk operation system and a full complement of peripherals. Generally, all parts of the code generation process are done on the host. The target is normally a minimum system and doesn't have enough hardware to support an operation system. Although some tests must be done on the target, it's quite common to do at least part of the testing on the host with only a final test on the target. In addition to these two processes, which are done in any software development, cross development also involves an additional step of transporting the object code from the host to the target. Interestingly, I've heard people who do a great deal of this kind of work talk about normal programming as a cross development in which the host and the target are the same system.

Code generation is less expensive if the host and the target have the same microprocessor as their base machine. Both may be based on 8080s for example. In this case, you can use the host's normal compilers, assembler and loader to produce the object code. If the two systems are not based on the same processor, the extra expense comes from the need to buy (or write) a cross development tool like a cross assembler or a cross compiler. Cross assemblers are advertised regularly in most advanced computing magazines and are also available in the public domain. I haven't seen any cross compilers advertised, but they may be available if you make inquiries in the right places.

The strategy that you adopt for code testing is also influenced greatly by the base processors of the two systems. If they are the same, you test portions of the target's software on the host, using the host's normal debug tools and peripherals. If you are careful when you structure the program, you may be able to test a very large percentage of it on the host and leave only the portion that handles the target's I/O functions for test on the actual target system.

If the two processors are not the same, there are still several test options open to you. One option is the use of an instruction level simulator (ILS) to simulate execution of the target's instruction set on the host. Instruction level simulators for the simpler processors like the 6502 or 8080 are relatively easy to write, and many people write them in high order languages. Once you have an ILS, you can use it to do the same kind of testing on the host that you would do if the two base processors were the same. (As of this writing, I have not seen any instruction level simulators available commercially or in the public domain.) Another test option, if you are writing part of the target program in a high level language, is the use of two separate compilers. One of these is the cross compiler that you will use to produce the code for the target machine. The other is a compiler to produce code that you will test on the host. If both compilers are of good quality, you can be confident that once the high level language portion of your program works on the host, it will run correctly on the target.

If the target is really a "minimum"

system, testing on the target will probably be at the machine language level. In the professional cross development world, there are exotic test tools (like in-circuit emulators) that allow you to use the power of the host while testing the target, but these require more hardware than you or I will probably ever have. In our environment, test aids on the target system will be sparse. The tools that are available and the complexity of the program that you are testing will influence the amount of work that you will be able to leave for the target machine. Testing with no tools at all might be possible but it would require either that your program be extremely simple or that you possessed an incredible amount of intuitive reasoning capability (or luck). A control panel is the lowest level test tool and the step beyond that, if you are lucky, is a debug program that does not require an operating system for I/O support. A debug program, however, would require that you had a terminal available to run it. The final problem is the transmission of object code from the host to the target. There are several approaches. Writing a diskette or a cassette tape on the host and reading it on the target is certainly the simplest, but is probably the least likely since it requires that the systems have compatible peripherals. For our minimum target system, a more likely solution is a communication link. For most of us who are using old systems, the available link will be RS-232. The protocol for the communication that you do over the link depends a great deal on the intelligence level of the target system when its power is first turned on. In the best case, the target has a ROM that will boot from the link. (In the good old days, we used teletypes and our mass storage was paper tape, so this isn't as far fetched as it sounds.) The next best case, if the target machine has a control panel, is to use the panel to enter a small boot routine by hand. If you choose this as an option, you may want to consider a two stage download. The first stage can be a very unsophisticated program that will only download a more sophisticated loader. This exotic loader can then download the actual software while doing error checking on the transmission. As a bonus, if you do your download via RS-

```
                ;*********************************************************
                ;
                ;       H-8  Loader
                ;
                ;       Walt Piotrowski
                ;       State University of NY
                ;       Binghamton, NY 13901
                ;
                ;*********************************************************
                ;
0005 =          BDOS    EQU     5
0023 =          FSIZE   EQU     35              ;File Size Code
000F =          OPEN    EQU     15              ;File Open
0010 =          CLOSE   EQU     16              ;File Close
0014 =          RDSEQ   EQU     20              ;Read Sequential
001A =          SETDMA  EQU     26              ;Set disk address
                ;
005C =          FCB     EQU     5CH             ;File Control Block
007D =          FCBSIZ  EQU     7DH             ;FCB Size Field
                ;
0016 =          SYN     EQU     16H             ;ASCII Sync
0002 =          STX     EQU     2               ;ASCII STX
0020 =          BLANK   EQU     20H             ;ASCII Blank
                ;
0080 =          SECSIZ  EQU     128             ;Disk sector size
                ;
0800 =          BUFST   EQU     800H            ;Input buffer
                ;
                ;
0100            H8LDR   ORG     100H
                ;
0100 210000     H8LDR   LXI     H,0             ;Clear HL
0103 39                 DAD     SP              ;Make a copy of SP
0104 225402             SHLD    STACK           ;Save for exit
0107 315402             LXI     SP,STACK        ;Get local stack
                ;
010A 3A5D00             LDA     FCB+1           ;Look at file name
010D FE20               CPI     BLANK           ;Not supplied?
010F CADB01             JZ      EREXIT          ;Error - no file name
                ;
0112 0E0F               MVI     C,OPEN          ;Open file code
0114 115C00             LXI     D,FCB           ;FCB Address
0117 CD0500             CALL    BDOS            ;Open it
011A 3C                 INR     A               ;Error code is 255
011B CADB01             JZ      EREXIT          ;Error - no file on disk
                ;
011E 0E23               MVI     C,FSIZE         ;File size command
0120 115C00             LXI     D,FCB           ;FCB Address
0123 CD0500             CALL    BDOS            ;Get size computed
0126 3A7D00             LDA     FCBSIZ          ;Get size LSBs
0129 320B02             STA     FILSIZ+1        ;H8 swaps them
012C 3A7E00             LDA     FCBSIZ+1        ;Get MSBs
012F 320A02             STA     FILSIZ          ;Swap these too
                ;
0132 0607       MUL128  MVI     B,7             ;Loop Ctr
0134 AF         MULLP   XRA     A               ;Clear Carry
0135 3A0B02             LDA     FILSIZ+1        ;Get LSBs
0138 17                 RAL                     ;Mult by 2
0139 320B02             STA     FILSIZ+1        ;Put back
013C 3A0A02             LDA     FILSIZ          ;Get MSBs
013F 17                 RAL                     ;Mult by 2
0140 320A02             STA     FILSIZ          ;Put Back
0143 05                 DCR     B               ;Decrement Loop Ctr
0144 C23401             JNZ     MULLP           ;Not done yet
0147 3A0A02             LDA     FILSIZ          ;Get LSBs
014A 321102             STA     FILCTR+1        ;Save for counting
014D 3A0B02             LDA     FILSIZ+1        ;Get MSBs
0150 321002             STA     FILCTR          ;Counter - normal order
                ;
                ;       Loop to read file into memory
                ;
0153 210008             LXI     H,BUFST         ;Input buffer start address
0156 225602             SHLD    BUFAD           ;Save for use
0159 E5                 PUSH    H               ;Copy on stack
015A D1         READLP  POP     D               ;Easy way to transfer
015B 0E1A               MVI     C,SETDMA        ;Disk address set
015D CD0500             CALL    BDOS            ;Set to local buf
0160 115C00             LXI     D,FCB           ;FCB Address
0163 0E14               MVI     C,RDSEQ         ;Read Sequential
0165 CD0500             CALL    BDOS            ;Read next record
0168 C600               ADI     0               ;Set flags
016A C27B01             JNZ     CLOSIT          ;Read finished
016D 2A5602             LHLD    BUFAD           ;Get buffer address
0170 118000             LXI     D,SECSIZ        ;Get sector size
0173 19                 DAD     D               ;Point to next block
0174 225602             SHLD    BUFAD           ;Put back
0177 E5                 PUSH    H               ;Copy on stack
0178 C35A01             JMP     READLP          ;Read next
                ;
017B 115C00     CLOSIT  LXI     D,FCB           ;FCB Address
017E 0E10               MVI     C,CLOSE         ;File close code
0180 CD0500             CALL    BDOS            ;Close it
                ;
                ;
                ;       Write to RS-232
                ;
                ;
0183 CD5802             CALL    OPMDEM          ;Open RS-232
                ;
```

232, you may be able to run a dubug program in the target by using your host, with a modem program, as a dumb terminal.

Once you have your software up and running properly, you may want to consider streamlining the whole process by eliminating the download from the host. The standard approach is to burn the software into a PROM. A good possibility, if your machine has a boot-up ROM, is to replace the existing ROM with your own. This also opens up the possibility of using your old machine as a stand-alone process controller in remote locations.

An Ideal Target Machine

My first home computer was a Heath H-8, which I bought shortly after they were announced. My initial investment in the computer, a terminal, two cassette recorders and a printer destroyed the family budget for a couple of years. When disk drives became available, I was still making the monthly payments on the equipment that I had already bought. For a lot of reasons, I wasn't active in home computing for a few years after the system was paid for and, when I finally got back to it, it was cheaper to buy a whole new system than to buy disk drives and more memory to upgrade my H-8.

My new system has a lot of bottlenecks, but the most annoying is the 30 character per second printer. (The printer, by the way, is the same DecWriter that I bought with my first system.) One night I was reading an article about a printer buffer and I thought about my unused H-8. It has the two serial ports that are required by my hardware. One had been used for the console terminal and the other was used for the DecWriter. Even though my H-8 only has 16K of memory, some quick arithmetic showed that it would hold about nine minutes worth of printing at 30 cps. Not terrific, but not bad either.

It turns out that the H-8 is almost ideally suited to be a target machine. It is based on the 8080 which means that any system that runs CPM-80 can be used as the development system. It was designed before the days of systems with integral keyboards and monitors, which means that it needed to have an RS-232 port to handle an external terminal. Its most important feature,

```
0186 0614           MVI     B,20            ;Write 20 characters
0188 3E16   SYNLP   MVI     A,SYN           ;Get sync character
018A CD5902         CALL    WRMDEM          ;Send to RS-232
018D 05             DCR     B               ;Loop counter down
018E C28801         JNZ     SYNLP           ;Do more
0191 3E02           MVI     A,STX           ;Get STX
0193 CD5902         CALL    WRMDEM          ;Write it
                    ;
0196 210000         LXI     H,0             ;Clear HL
0199 221202         SHLD    CRCSUM          ;Clear CRC
019C 0608           MVI     B,HDRSIZ        ;Get header size
019E 210802         LXI     H,RECHDR        ;Record header address
01A1 7E     HDRLP   MOV     A,M             ;Get character
01A2 CDE001         CALL    CRC             ;Update checksum
01A5 CD5902         CALL    WRMDEM          ;Send to RS-232
01A8 23             INX     H               ;Point to next char
01A9 05             DCR     B               ;Loop ctr down
01AA C2A101         JNZ     HDRLP           ;Send more
                    ;
01AD 2A1002         LHLD    FILCTR          ;Get number of bytes
01B0 EB             XCHG                    ;Put filsiz in DE
01B1 210008         LXI     H,BUFST         ;Buffer Address
01B4 7E     DATLP   MOV     A,M             ;Data byte
01B5 CDE001         CALL    CRC             ;Update CRC
01B8 CD5902         CALL    WRMDEM          ;Output the char
01BB 23             INX     H               ;Point to next char
01BC 1B             DCX     D               ;Loop ctr down
01BD 7A             MOV     A,D             ;Get LSBs
01BE B7             ORA     A               ;Set flags
01BF C2B401         JNZ     DATLP           ;Not done
01C2 7B             MOV     A,E             ;Get MSBs
01C3 B7             ORA     A               ;Set flags
01C4 C2B401         JNZ     DATLP           ;More chars to send
                    ;
01C7 2A1202         LHLD    CRCSUM          ;Get CRC
01CA 7C             MOV     A,H             ;Get MSBs
01CB CD5902         CALL    WRMDEM          ;Write it
01CE CDE001         CALL    CRC             ;Put it in too
01D1 7D             MOV     A,L             ;CRC LSB
01D2 CD5902         CALL    WRMDEM          ;Send it
01D5 CDE001         CALL    CRC             ;See if it checks
                    ;
01D8 CD5A02         CALL    CLMDEM          ;Close RS-232
                    ;
01DB 2A5402 EREXIT  LHLD    STACK           ;Get CPM stack ptr
01DE F9             SPHL                    ;Back into SP
01DF C9             RET
                    ;
                    ;
                    ;       CRC - Compute CRC-16
                    ;
                    ;               (X+1)*(X^15 + X+1)
                    ;
                    ;               (Duplicate of the H-8 PAM CRC)
                    ;
                    ;
01E0 C5     CRC     PUSH    B               ;Save (BC)
01E1 0608           MVI     B,8             ;(B)=Bit count
01E3 E5             PUSH    H
01E4 2A1202         LHLD    CRCSUM
01E7 07     CRC1    RLC
01E8 4F             MOV     C,A             ;(C)=Bit
01E9 7D             MOV     A,L
01EA 87             ADD     A
01EB 6F             MOV     L,A
01EC 7C             MOV     A,H
01ED 17             RAL
01EE 67             MOV     H,A
01EF 17             RAL
01F0 A9             XRA     C
01F1 0F             RRC
01F2 D2FD01         JNC     CRC2            ;If not to XOR
01F5 7C             MOV     A,H
01F6 EE80           XRI     200Q
01F8 67             MOV     H,A
01F9 7D             MOV     A,L
01FA EE05           XRI     5Q
01FC 6F             MOV     L,A
01FD 79     CRC2    MOV     A,C
01FE 05             DCR     B
01FF C2E701         JNZ     CRC1            ;If more to so
0202 221202         SHLD    CRCSUM
0205 E1             POP     H               ;Restore (HL)
0206 C1             POP     B               ;Restore (BC)
0207 C9             RET                     ;Exit
                    ;
                    ;       Data
                    ;
0208 81     RECHDR  DB      81H             ;Type (mem image) & EOF
0209 01             DB      1               ;Record #1
020A 0000   FILSIZ  DB      0,0             ;Number of bytes
020C 2040   H8NTRY  DB      20H,40H         ;H8 Entry (040 100)
020E 2040   H8LOAD  DB      20H,40H         ;H8 Load Address
0008 =      HDRSIZ  EQU     $-RECHDR        ;Header length
                    ;
0210 0000   FILCTR  DW      0               ;Output counter
0212 0000   CRCSUM  DW      0               ;CRC
                    ;
```

however, is that it contains a built-in solution to the download and debug problems.

The H-8 ROM contains a program that Heath called the Panel Monitor (PAM). The system boot routine is a part of PAM and the earlier H-8s normally booted from cassette recorders through the Serial I/O and Cassette Board (H8-5). In the early days, Heath was trying to sell systems to people who already had teletypes and paper tape readers and, to accomodate them, they provided a port interchange switch on the H8-5 board. When you flip the switch, the board exchanges the addresses of the console port and the cassette port. The ROM, thinking it is still talking to a cassette, is actually handling the RS-232 line. Booting from an inter-computer link requires pushing just one button (as long as the host machine transmits the file using the protocol that PAM expects). PAM also contains a complete machine language debugger which takes commands from the front panel keys and displays results on the front panel LEDs. (The system would be perfect except for one small frustration: the panel monitor displays everything in octal, and CP/M's assembler prints everything in hex.)

An assembly language program that will download from a CP/M system to an H-8 is provided with this article. The program takes the name of the file to be downloaded from the command line and expects to find a file by that name in COM format on the disk. It assumes that the program will load at the normal H-8 start address of 2040H (040 100 in H-8 split octal). Getting the H-8 program into COM format after assembling it at 2040H requires some manipulations. These are given in a note at the end of the article.

My CP/M system is a Commodore 64. In the C-64, handling the RS-232 port from CP/M requires code for both the Z-80 CP/M co-processor and the native 6510. Since this code is lengthy and is of interest only to C-64 CP/M users, I have not included it in the listing. Instead, you will find a commented section at the end of the listing that shows where you should insert code to handle your host machine's RS-232 port. The comments also identify what the main program expects the subprograms to do. If you are a C-64 owner, contact me

```
0214                    DS      64              ;Local Stack
0254 0000       STACK   DW      0               ;CPM Stack save
                ;
0256 0000       BUFAD   DW      0
                ;-----------------------------------------------------------
                ;
                ;
                ;       RS-232 Interface Routines
                ;
                ;-----------------------------------------------------------
                ;
                ;       Insert your RS-232 code here.  Your routines
                ;       should restore all registers to their original
                ;       values before returning.
                ;
0258 C9         OPMDEM  RET                     ;Insert your RS-232 port setup
                                                ;here.
                ;
0259 C9         WRMDEM  RET                     ;Insert the code to output a
                                                ;a character to your RS-232
                                                ;here.  Your routine should
                                                ;include a status check.
                ;
025A C9         CLMDEM  RET                     ;Insert the code required to
                                                ;shut off your RS-232 port
                                                ;before returning to CP/M here.
                ;
                ;
025B                    END
```

```
/*********************************************************************/
/*                                                                   */
/*                                                                   */
/*              Print buffer program for                             */
/*                  Heath H-8                                        */
/*                                                                   */
/*              Walt Piotrowski                                      */
/*              State University of NY                               */
/*              Binghamton, NY                                       */
/*                                                                   */
/*                                                                   */
/*********************************************************************/

#include crtbuf.cl
#include sc80.cc

#define bufsiz 15000
#define true 1
#define false 0

MAIN()
  {
  char circbuf [bufsiz];        /* Circular buffer */
  int inptr,otptr;              /* Buffer pointers */
  int inpoff;                   /* Input (RTS) off flag */
  char recchar;                 /* Received character */

  /*  Initialize          */
  inset ();                     /* Set up input USART */
  otset ();                     /* Set up output USART */
  inpoff = false;               /* Input is on */
  inptr = 0;
  otptr = 0;

  /*  Main Loop           */
  while (true)
    {

    /*  Character Input */
    if (rdyin ())
      {recchar  = chrin();
      if (recchar != 0)
        {circbuf[inptr++] = recchar;}
      if (inptr==bufsiz) {inptr=0;}
      buffull(inptr,otptr,&inpoff);
      }

    /* Character Output */
    if (inptr!=otptr & rdyot()==true)
      {chrot (circbuf [otptr++]);
      if(otptr==bufsiz) {otptr=0;}
```

and we can make arrangements for giving you a copy of the entire program.

An H-8 Printer Buffer

My main machine, which will transmit to the printer buffer, uses what's been called an x-line protocol for RS-232 transmission. It responds to Data Terminal Ready (DTR) and Request to Send (RTS) on the RS-232 line. Normally, the DTR signal from the receiving device is controlled by hardware and is asserted whenever the power is on. The RTS line is manipulated dynamically by the receiver to control the data flow. The H-8 program, described later, uses this RTS line to shut off the data flow when the buffer memory is full.

Slight hardware mods were needed to set DTR and RTS signals from the H8-5 board. All of the H-8's serial devices used a 3 line RS-232 interface, which does not provide control functions between the receiver and the sender. For some unknown reason, a great deal, but not all, of what was required to provide DTR and RTS signals was already on the board. The hardware mods provided at the end of the article will make sense if you have an H8-5 logic diagram in front of you. In essence, they do the following:

1) Provide pullups for the collectors of the transistors that provide the DTR and RTS signals.
2) Reverse the sense of the DTR signal so that it goes high when power is on.
3) Provide a cable and back panel connector to get the additional RS-232 signals from the H8-5 board onto an RS-232 cable.

Listings for the H-8 print buffer program are provided along with this article. The program is in two parts. The control portion, written in Small C, contains an infinite loop which polls the input line for data and also polls the output line to see if it is ready to transmit another character. Since the input rate is higher than the output rate, the excess characters go into a circular buffer. When the circular buffer is dangerously close to full, the program shuts off the input by dropping the RTS (Request to Send) signal on the input line. It turns the input back on again when there is more room in the buffer. The actual I/O to handle the H-8's USARTs is done with assembly

```
        buffull(inptr,otptr,&inpoff);
        }
      }
    }
/*  Buffer full check  */
buffull(inptr,otptr,pinpoff)
  int inptr,otptr,*pinpoff;

  {
  int slotslft;                    /* Number of slots left */

  slotslft = otptr-inptr;
  if (slotslft <= 0)
    {slotslft = slotslft + bufsiz;
    }
  if ((slotslft < 20) & (*pinpoff == false))
    {*pinpoff = true ;
    trnof();
    }
  if ((slotslft > 20) & (*pinpoff == true))
    {*pinpoff = false ;
    trnon();
    }
  }
#asm
;*********************************************************
;
;                H-8 Print Buffer Subroutines
;                   Walt Piotrowski
;
;*********************************************************
;
;
;       Input USART Equates
;
INMOD   EQU     116Q            ;Mode Inst
INCMON  EQU     064Q            ;Cmd RTS on
INCMOFF EQU     024Q            ;Cmd RTS off
INCTL   EQU     371Q            ;Control Port
INDATA  EQU     370Q            ;Data Port
INSTAT  EQU     371Q            ;Status Port
;
;       Output USART Equates
;
OUTMOD  EQU     116Q            ;Mode Inst
OUTCMD  EQU     1               ;Command Inst
OUTCTL  EQU     377Q            ;Control Port
OUTDATA EQU     376Q            ;Data Port
OUTSTAT EQU     377Q            ;Status Port
;
TXREDY  EQU     1               ;TX Ready Status Bit
RXREDY  EQU     2               ;RX Ready Status Bit
;
TRUE    EQU     1
FALSE   EQU     0
;
;------
;
;       Shut input off
;
QZTRNOF MVI     A,INCMOFF       ;Get off command
        OUT     INCTL           ;Send to USART
        RET
;
;------
;
;       Turn input on
;
QZTRNON MVI     A,INCMON        ;Get on command
        OUT     INCTL           ;Send to USART
        RET
```

language subprograms. These are given in the third listing.

By using Small C, it was possible to check out the control portion on the host by INCLUDEing a test library in place of the actual I/O routine library. Since I had never written a program in C before, this was an important consideration for me. When the program ran satisfactorily on the host, I transmitted it to the target with only the I/O left to be checked.

H8-5 Hardware Mods

Board Changes:

1) Cut the solder trace from IC122 pin 1 to IC 124 pin 23.
2) Cut the solder trace from IC122 pin 3 to R154.
3) Cut the solder trace from IC122 pin 6 to R155.
4) Connect IC122 pin 6 to IC122 pin 1.
5) Connect IC122 pin 3 to R155 (same end as step 3).
6) Connect IC124 pin 23 to IC117 pins 12 and 13.
7) Connect IC117 pin 11 to R154 (same end as step 2).
8) Connect a 2200 ohm ½ watt resistor between P102 pin 9 and P102 pin 1.
9) Connect a 2200 ohm ½ watt resistor between P102 pin 9 and P102 pin 2.

Cables:

The following signals at P102 on the H8-5 board need to be brought out to the back panel and from there to the RS-232 cable. The RS-232 connections shown assume that your host computer is wired as Data Terminal Equipment (DTE).

Signal	P102	Rs-232
RTS	Pin 1	Pin 5
DTR	Pin 2	Pin 20
GND	Pin 4	Pin 1
Data In	Pin 5	Pin 2
Data Out	Pin 8	Pin 3

Connectors:

The following connectors are those used by Heath:

S102-
- Molex 22-01-2105
- G C Electronics 41-130

Back Panel Connectors:
- Molex 03-06-2151 (plug)
- Molex 03-06-1151 (socket)
- Sold as a package by Waldon 1625-15

PRT

Miscellaneous Software Procedures

To make a COM file from a HEX file that has been ORGed at 2040H use DDT with the following commands:

iFN.HEX
rEOCO

If you are using Small C 1.1, which generates a file for ASM, you can make a HEX file for your target machine by modifying the first few lines of the ASM file produced by the compiler. In the ASM file, change the ORG to the address appropriate for your machine (2040H in this case) and change the stack pointer setup to point to the top of your target's memory.

```
;
;       See if input ready
;
QZRDYIN IN      INSTAT          ;Get status
        ANI     RXREDY          ;Mask
        JZ      RDYIN1          ;0 = not ready
        LXI     H,TRUE          ;Char is ready
        RET
 B:CPRTBUF.CL

RDYIN1  LXI     H,FALSE         ;No char
        RET
;
;------
;
;       See if output ready
;
QZRDYOT IN      OUTSTAT         ;Get status
        ANI     TXREDY          ;Mask
        JZ      RDYOT1          ;0 = not ready
        LXI     H,TRUE          ;Ready for output
        RET
RDYOT1  LXI     H,FALSE         ;Not ready
        RET
;
;------
;
;       Set up input USART
;
QZINSET MVI     A,INCMON        ;Command
        OUT     INCTL           ;Out to control port
        RET
;
;------
;
;       Set up output USART
;
QZOTSET MVI     A,OUTMOD        ;Mode
        OUT     OUTCTL          ;Out to control port
        MVI     A,0             ;Setup for wait loop
OUTDLY  INR     A               ;Increment
        JNZ     OUTDLY          ;Wait for USART
        MVI     A,OUTCMD        ;Command
        OUT     OUTCTL          ;Out to control port
        RET
;
;------
;
;       Input a character
;
QZCHRIN IN      INDATA          ;Read it
        MOV     L,A             ;Low order of param
        MVI     H,0             ;Hi order
        RET
;
;------
```

Listing continued on page 14

PERSONAL ROBOTICS EXCLUSIVELY
FACTORY AUTHORIZED DEALERS

HAVE YOU HEARD ABOUT SAVVY?

SAVVY is a revolutionary programming language for the Apple II+ & IIe and the IBM PC. It approaches artificial intelligence. Besides being a perfect language for robot control, it can handle general applications programming. Write or call for detailed descriptive material.

A FULL-LINE ROBOT SUPPLIER

1. No dissatisfied customers.
2. Call if you have questions—we know our products.
3. Unlimited help when you need it.

KITS	List	SALE
MOVIT		
Screwdriver Kits—No Solder—FUN		
Avoider	44.95	40.15
Circular	67.95	63.75
Line Tracer	39.95	36.75
Medusa	27.95	26.25
Memoconcrawler	74.95	70.15
Monkey	24.95	23.65
Mr. Bootsman	30.95	29.25
Peppy	24.95	23.65
Piper Mouse	44.95	40.13
Sound Skipper	24.95	23.65
Turn Backer	39.95	36.75
We have sold hundreds of these items. They work as they should and they last.		
HARVARD ASSOC.		
Turtle Tot	299.00	275.00
Excellent for simple educational applications. Our customers have been very satisfied.		
ROBOT SHOP		
Robot Bug	129.95	122.00
Z-1	149.95	136.50
Z-2	249.95	223.50
Simple and dumb, but lots of potential for customizing and expansion.		

ROBOTS	List	SALE
ANDROBOT		
Slave to your computer		
TOPO III	1595.00	1485.00
Accessories		CALL
TOPO III moves and talks very well. It uses LOGO-like commands and a good text-to-speech system.		
RB ROBOT		
Download from your computer		
RB5X	2295.00	2058.00
Accessories		CALL
Program it in Tiny BASIC or use a SAVVY to Tiny BASIC "compiler". RB5X has bumpers and sonar, voice with sound effects, arm, easy-to-use programming language, additional senses are available. It is good quality. Our two demos have seen hard use and haven't broken down yet!		
ARCTEC		
GEMINI	6995.00	6506.00
A marvel. Three CPUs, voice recognition, goal-oriented navigation, on-board disk drive, detachable keyboard, and more.		

TECHNICAL INFO—WE CAN HELP. CALL

Shipping Over $200 Add 4%. $200 And Under Add 5%.
Cash With Order Deduct 3%. N.M. Orders Add 5% Sales Tax.
Allow 4 Weeks For Delivery.

RIO GRANDE ROBOTICS RG

A Division of Mobile Intelligence Corporation
1595 W. Picacho #28, Las Cruces, N.M. 88005. Tel. (505) 524-9480

RP/M T.M

By the author of Hayden's "CP/M Revealed."

New resident console processor RCP and new resident disk operating system RDOS replace CCP and BDOS without TPA size change.

User 0 files common to all users; user number visible in system prompt; file first extent size and user assignment displayed by DIR; cross-drive command file search; paged TYPE display with selectable page size. SUBMIT runs on any drive with multiple command files conditionally invoked by CALL. Automatic disk flaw processing isolates unuseable sectors. For high capacity disk systems RDOS can provide instantaneous directory access and delete redundant nondismountable disk logins. RPMPIP utility copies files, optionally prompts for confirmation during copy-all, compares files, archives large files to multiple floppy disks. RPMGEN and GETRPM self-install RP/M on any computer currently running CP/M®2.2. Source program assembly listings of RCP and RDOS appear in the RP/M user's manual.

RP/M manual with RPMGEN.COM and GETRPM.COM plus our RPMPIP.COM and other RP/M utilities on 8" SSSD $75. Shipping $5 ($10 nonUS). MC, VISA.

118 SW First St. - Box G
Warrenton, OR. 97146

Micro Methods, inc.

(503) 861-1765

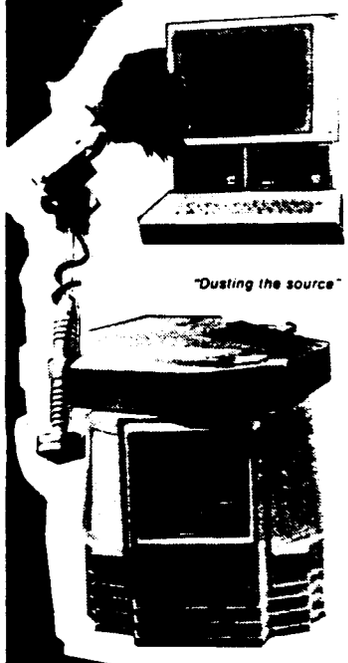

"Dusting the source"

HERO®/APPLE® HANDSHAKE

ROBI. . .an affordable interface for the robotics experimenter. Easy hook-up (8 screws on HERO ®, 1 card slot on Apple ® II or IIe) and a low price are combined with extra capabilities in the ROBI computer/robot interface.

$199.00!

VISA MasterCard

ROBI SPECIFICATIONS

- *4 programmable, bidirectional 8-bit ports for interface and expansion*
- *programmable control over handshaking*
- *access to signals through tie point blocks on robot's Experimenta Board*
- *6-foot cable for interface, limited remote operation*
- *user-friendly software quickly transfers files between computer and robot stores and retrieves files to and from disk*
- *not copy protected. Software is provided in DOS 3.3*
- *liberally commented source code included*

BERSEARCH
Information Services

26160 Edelweiss Circle
Evergreen, CO 80439
(303) 674-0796

APPLE ® is a trademark of Apple Computer
HERO ® is a trademark of Heath Electronics

BASE

A Series on How To Design and Write Your Own Database

By E.G. Brooner

We come now to the theoretical means that can be used to 'find' some particular bit of information or some related set of data items. Placing information into some particular order and finding it again involves techniques generally summarized as *sorting and searching*. We are assuming that the information has been originally stored in some random, un-ordered manner.

Sorting, of course consists of placing the data in some kind of ascending or descending order, alphabetically or numerically. There is actually little difference between the two in computer applications because sorting is based on the ASCII value of the characters—the ASCII value of the numeral '9' is larger than the value of the numeral '8,' and the value of 'B' is greater than 'A.'

As we will probably enter data more or less haphazardly, as it comes to us, this sorting has to be done by the program after the data has been entered. It may have to be done again from time to time as more data is added. There are several interesting programming techniques used to accomplish this end.

Searching is also a diversified concept, and the means used depends on how the information is ordered and stored in the files. One technique we'll discuss is indexing, which is used almost exactly as the index is used in a book or catalog. Another is the apparently magical means of using the data itself as a clue to its location on the disk; this is known as 'hashing.' Binary searching is another method ideally suited to computer use, since it is based on the kind of logic computers use.

The sequential search. Assume a list of names or numbers, which may or may not be in any particular order; assume then that you wish to locate one particular item. Your only choice is to start at the beginning and check each item until you find the correct one. This is O.K. for a single printed page or for a data file of a few dozen items, but it can be time-consuming if the list is long. Many file programs use the sequential access method; it is simple and for some purposes is perfectly adequate. In some cases it is mandatory—in a database it is often necessary to find several entries that meet the same criteria, which means that the entire file has to be read to make sure none are missed.

Sorted order. Next, consider that the list of names has been sorted into alphabetical order (as in a phone directory or dictionary). We open the list and look at an entry; if we are looking for 'Jones' and the list falls open to 'Conrad' we know to look beyond that point. If it falls open to 'Smith' we flip back toward the beginning. Repeating this process narrows the search until we find the entry for which we are looking. This is the basis for the binary search we will discuss later.

Direct addressing. Now consider a similar list that is numbered in sequence. If we know that the item we want is entry number 876 we can go directly to it. In effect this is what we frequently do with a data file, if and when we know which relatively numbered record it is that we want. If we are using a so-called

```
REM     ************************
REM     *SINGLE-SEARCH ROUTINE*
REM     ************************
5000    GOSUB 9999
REM     DEFINE THE FILE STRUCTURE
        FILE$="B"+NAME$+".EXT"
        OPEN FILE$ AS 16
        READ #16;EXT%                          REM HOW MANY RECORDS
        CLOSE 16                               REM IN THIS FILE?
        FILE$="B"+NAME$+".DEF"
        NBR.OF.FLDS%=0
        OPEN FILE$ AS 16
        FOR X%=1 TO 12
                IF END #16 THEN 5050
                READ #16;FLD.NAME$,FL%(X%)
                NBR.OF.FLDS%=NBR.OF.FLDS%+1
                PRINT  X%;TAB(5);FLD.NAME$     REM LIST THE  NAMES
                FIELD.NAME$(X%)=FLD.NAME$      REM OF THE FIELDS
        NEXT X%
5050    CLOSE 16

5100    PRINT "TO TERMINATE SEARCH, ENTER # ";NBR.OF.FLDS%+1:PRINT
        INPUT "SEARCH ON FIELD NUMBER ";FLD%
REM     ANY FIELD CAN BE USED AS THE 'KEY' FOR SEARCHING
        IF FLD%<1 THEN 5100
        IF FLD%> NBR.OF.FLDS% THEN 1300
        INPUT "SEARCH-KEY (ANY # LEFTMOST CHAR OF FIELD ";KEY$
        K.L%=LEN(KEY$)
REM     YOU CAN USE PART OF THE FIELD AS A KEY
REM     AND FIND AN EXACT MATCH, OR ALL GREATER OR LESS THAN KEY
        PRINT "RELATION OF RECORD TO KEY: 1=EQUAL TO"
        PRINT TAB(28);"2=GREATER THAN"
        PRINT TAB(28);"3=LESS THAN"
        INPUT REL%
        IF REL%<1 OR REL%>3 THEN 5100
REM     CREATE FILE NAME, OPEN IT, AND START LOOKING
        FILE$="B"+NAME$+STR$(FLD%)+".DAT"
        OPEN FILE$ RECL FL%(FLD%)+5 AS 16
        IF END #16 THEN 5200
        FOR N%=1 TO EXT%
                READ #16;DATUM$
                DATUM$=LEFT$(DATUM$,K.L%)
                ON REL% GOTO 5110,5120,5130
REM     COMPARE RELEVANT PART OF FIELD W/CHOSEN RELATIONSHIP

5110            IF DATUM$=KEY$ THEN 5140
                GOTO 5150
5120            IF DATUM$>KEY$ THEN 5140
```

'random access' (or 'relative') file, the operating software keeps track of where each record is located and we simply ask for the record by number.

Keyed access. Sorted order and direct addressing can be combined in a very useful way. If the records are numbered we can first sort the 'key' (names, in this example) and rearrange the record numbers in accordance with the alphabetical order of the names. Doing this results in a 'mixed-up' list of record numbers. Now if we read the records in the 'mixed-up' order we will find that the resulting list of names will come out in the sorted order. This will be illustrated when we get to the portion of BASE that does the actual sorting.

This kind of arrangement has a particular advantage for computer use. After sorting the record numbers as described, we store them as a separate list. This list is then known as a 'key file' or index file. The advantage is that the original list of names has not been altered in any way from its random order. But by referring to the key file we can go directly to the information as if it were in alphabetical order.

Binary search. The technique just described does not, by itself, solve all problems. We still might need a quick way of leafing through the key file to find out which record number corresponds to the name 'Jones.' The binary search is one way to do so. A key file that is to be used in this way has to contain the key fields in their sorted order, along with their record numbers in whatever order they happen to be. The binary search process then looks at the key fields and uses the associated record number to find the complete record.

The binary search only needs to know the length of the file, or list, and whether it is in ascending or descending order. It reads the key in the center, and learns whether the desired record is higher or lower in the order of things. It then examines the center of either the upper or lower half, as the case may be, and gets that much closer. About half a dozen 'looks' will find almost any entry in a list of a thousand or so items. Doubling the list's length only adds one more 'look,' and so on. The binary search is blindingly fast when using an in-memory array; it is quite impressive even when reading from a disk file. On the average, a binary search will find the desired record in 4 tries for a list of 25, 6 tries for 100, and 9 or 10 tries for a 1000 record file. 2000 records needs 11 tries, 5000 about 12 or 13, and 10000 only one more. Even searches of this magnitude, reading the records from a disk, take only a few seconds.

```
                GOTO 5150
5130            IF DATUM$<KEY$ THEN 5140
                GOTO 5150
REM             WHEN KEY FOUND, GO READ ENTIRE RECORD

5140            FOUND%=N%       REM KEY MATCHES THIS RECORD
                PRINT "RECORD NUMBER ";FOUND%:PRINT
                GOSUB 9000      REM READ THE WHOLE RECORD
                IF CONTINUE$="M" THEN 5200
5150    NEXT N%
5200    CLOSE 16
        GOTO 5000

REM     SEARCH HAS ENDED
6000    CHAIN "FILESORT.COM"                REM IF OPTION CHOSEN

7000    CLOSE 17,18:GOTO 1000   REM & START OVER
8000    CHAIN "PRTFORM.COM"                 REM IF OPTION CHOSEN
REM     THE '.COM' EXTENSION IS USED ONLY IN THE CB-80 VERSION

REM     *************************
REM     *FIND AND READ FILE 'N'*
REM     *************************
REM     SUBROUTINE CALLED BY SEARCH SECTION WHEN KEY FOUND

9000    FOR X%=1 TO NBR.OF.FLDS%
                FILE$="B"+NAME$+STR$(X%)+".DAT"
                OPEN FILE$ RECL FL%(X%)+5 AS X%
                READ #X%,FOUND%;DATA$(X%)
                PRINT FIELD.NAME$(X%),DATA$(X%)
        NEXT X%
        FOR X%=1 TO NBR.OF.FLDS%
                CLOSE X%
        NEXT X%
        PRINT "TYPE <CR> TO CONTINUE SEARCH OR <M> FOR MENU"
REM     WHEN THROUGH VIEWING THE DATA, PRESS RETURN TO CONTINUE
REM     SEARCH AND DISPLAY, OR 'M' TO END SEARCH
        INPUT LINE CONTINUE$
        RETURN


9999    PRINT CHR$(26)              REM CLEAR SCREEN
        RETURN                      REM CHANGE FOR YOUR TERMINAL
REM     THE DATA STATEMENTS NECESSARY ONLY IN CB-80 VERSION
REM     WHICH HAS TO RESERVE DATA AREA FOR CHAINED PROGRAMS.
        DATA "A","B","C","D","E","F","G","H","J","K","L","M"
        END
```

In our database examples we will probably have to provide for more than one kind of search. We might, for example, sort the records for some kinds of access, and 'find' by relative address for others; at other times we might read the entire file sequentially and check every entry. It's obvious, then, that we will want to provide for more than one way of reading any particular file or set of files. This will be explored more fully when we come to the sections of the program that actually handle these chores.

At this writing we have not added any of the more exotic methods of sorting and searching to the main BASE program, but they are worth describing and considering in the general context of database programming. As a matter of actual fact, the main body of BASE uses a simple sequential search, the options being only to match a key, or find those either larger or smaller. For the latter two conditions a sequential search is a necessity anyway.

The simple sort program that will be shown in another column builds key files consisting only of the record addresses; this permits a file to be printed in ascending order based on any field. Two other programs are in existence that operate on BASE's files. One of these (called MATCH) allows us to match two fields, such as first name and

telephone area code—i.e: Joe who lives in Seattle, area code 206.) The other (called BINARY) sorts selected files, as does the main program, but stores the keys in such a way as to provide a binary search which is part of the same program. If time and space permit, these auxiliary programs will be published at a later date. Keep in mind, though, that the portions of BASE shown to date, even without any sorting, can be very useful for modest-size databases.

In BASE we have kept each field (of any set of records) as a separate file—this makes sequential searching (for a single field) quick and easy and simplifies using any field as 'key.' It also makes each of those mini-files easy to sort into a key file. Whether sorted or unsorted, the individual field in any field-file is inexorably related to the rest of its record by direct-addressing. Thus, we will be able to search such files at least three different ways and retrieve the remainder of the record after the key is located. Since all fields can be 'key' in this system, your searches can be as flexible as you wish to make them.

The actual sorting of files for BASE has been kept a completely separate operation, and is in fact an auxiliary program that is 'chained' when we select that option from the main menu. The printing of reports is also a separate, chained program in this package. This was done to keep the program(s) small enough for a small memory, and to make the specialized sections easy to modify and/or experiment with.

If you choose to combine the listings up to this point you will find that the source program runs around 400 lines and takes about 10K of filespace. When compiled with CB-80 it results in a machine language file of approximately 18K. The sorting and printing programs are both considerably smaller. If you have to use the CRUN version, though, you will have less memory available because of the presence of the runtime program, so if memory is limited you might consider stopping here for awhile.

How the Searching Goes

Selective searches enable the user to extract different 'sub-sets' of information from a larger collection of data. All zip codes for Montana, for example, begin with 59; if I had several thousand subscribers in a mailing list I could extract those in Montana by asking for any zip beginning with 59. This search could be narrowed to one particular distribution point (sub-area) by asking for 598, or 599, or the exact complete code could be used to pinpoint addresses at a single post office. By the same reasoning one might want to list all customers having a given phone area code. One feature I included in my personal mailing list was a 'code' field. If the code is XC, that address is one to whom I send Christmas cards. Once a year, then, I can extract my card list from the hundreds of addresses I keep for other purposes. In my humble opinion being able to 'key-in' on any field, and to use partial keys, is essential to database operation.

The following section will work with the files that the earlier portions of the program created, regardless of whether the data has been sorted or not. It is a simple sequential search; however, it goes quite rapidly because only one field (of each record) need be read until the sought-for record is found. If we examine the basic searching routines of BASE (which follow), we will have looked at the entire main program. Keep in mind that they do not depend on the files being sorted, so you can actually run the program and get some use from it by combining the listings that were included in the earlier columns plus this one. Sorting and printing will be considered in future columns. If you wish, they can be completely omitted from the package, or you can design your own if ours don't fit your needs. Those that will be included in the package are kept simple for training purposes but have been adequate for most uses.

The main function of the sort program that will be presented is to create and update key files. Once they are created they can be used in a variety of ways.

In keeping with this program's design, a search first determines that the file(s) exists and 'learns' the structure of its records. (Remember, there may be several mini-databases on the same disk, running from this one program.) You then choose which field to use as key, and which portion of it (for example, ZAN for ZANZIBAR), and specify that you wish to match the key, or see records greater or less than the key. You might, for example, specify 'less than ZZZ' to view the entire file. A recently added feature permits us to specify a range of values such as greater than A, and less than C, for example, to list all the existing entries that begin with B. Although it is not shown in this listing it can be added quite simply, since it is just a combination of the 'greater than' and 'less than' comparisons.

When the key is found the entire record is read and displayed. You have the option of either continuing to look through the file or returning to the menu to proceed with another function. ■

H-8 Print Buffer Subroutines, continued from page 10

```
;
;       Output a character
;
QZCHROT POP     D               ;Get return
        POP     H               ;Get character
        PUSH    H               ;Fix stack
        PUSH    D               ;Fix stack
        MOV     A,L             ;Into A
        OUT     OUTDATA         ;Send it
        RET
;endasm                                          ■
```

QUALITY SOFTWARE AT REASONABLE PRICES

CP/M Software by

Poor Person Software

Poor Person's Spooler $49.95
All the function of a hardware print buffer at a fraction of the cost. Keyboard control. Spools and prints simultaneously.

Poor Person's Spread Sheet $29.95
Flexible screen formats and BASIC-like language. Pre-programmed applications include Real Estate Evaluation.

Poor Person's Spelling Checker $29.95
Simple and fast! 33,000 word dictionary. Checks any CP/M text file.

aMAZEing Game $29.95
Arcade action for CP/M! Evade goblins and collect treasure.

Crossword Game $39.95
Teach spelling and build vocabulary. Fun and challenging.

Mailing Label Printer $29.95
Select and print labels in many formats.

Window System $29.95
Application control of independent virtual screens.

All products require 56k CP/M 2.2 and are available on 8" IBM and 5" Northstar formats, other 5" formats add $5 handling charge. California residents include sales tax.

Poor Person Software
3721 Starr King Circle
Palo Alto, CA 94306
tel 415-493-3735

CP/M is a registered trademark of Digital Research

DSD 80
FULL SCREEN SYMBOLIC DEBUGGER

"THE SINGLE BEST DEBUGGER FOR CP/M-80. A TRULY AMAZING PRODUCT."

Complete upward compatibility with DDT
Simultaneous instruction register stack & memory displays
Software In Circuit Emulator provides write protected memory execute only code and stack protection
Full Z80 support with Intel or Zilog Mnemonics
Thirty day money back guarantee
On-line help & 50 page user manual

NOW ONLY $125.

SOFTADVANCES
P.O. BOX 49473 AUSTIN, TEXAS 78765 (512) 478-4763

FREE SOFTWARE

RENT FROM THE PUBLIC DOMAIN!

User Group Software isn't copyrighted, so there are no fees to pay! 1000's of CP/M and IBM software programs in .COM and source code to copy yourself! Games, business, utilities! All FREE!

CP/M USERS GROUP LIBRARY
Volumes 1-92, 46 disks rental—$45

SIG/M USERS GROUP LIBRARY
Volumes 1-90, 46 disks rental—$45
Volumes 91-176, 44 disks rental—$50
SPECIAL! Rent all SIG/M volumes for $90

K.U.G. (Charlottesville) 25 Volumes—$25

IBM PC-SIG (PC-DOS) LIBRARY
Volumes 1-200, 5¼" disks $200

174 FORMATS AVAILABLE! SPECIFY.

Public Domain User Group Catalog Disk $5 pp. (CP/M only) (payment in advance, please). Rental is for 7 days after receipt, 3 days grace to return. Use credit card, no disk deposit. Shipping, handling & insurance—$7.50 per library.

(619) 944-0925 information,(9-5)
(619) 727-1015 anytime order machine
Have your credit card ready! VISA, MasterCard, Am. Exp.

Public Domain Software Center
1533 Avohill Dr.
Vista, CA 92083

CTM

"...received my moneys worth with just one issue..."
—J. Trenbick

"...always stop to read CTM, even though most other magazines I receive (and write for) only get cursory examination..."
—Fred Blechman, K6UGT

USA	$15.00 for 1 year
Mexico, Canada	$25.00
Foreign	$35.00(land) - $55.00(air)
(U.S. funds only)	
Permanent (U.S. Subscription)	$100.00
Sample Copy	$3.50

CHET LAMBERT, W4WDR
1704 Sam Drive • Birmingham AL 35235
(205) 854-0271

FAX-64: Facsimile Pictures on a Micro

by Michael J. Keryan

Several years ago, most home computers were owned by "hackers." These people knew how every integrated circuit in their computer worked and they could explain every byte of the code in their computer's operating system. Although there are probably just as many hackers around today, there are a lot more owners of home computers classified as "users." Due to the rapid advancement in software, you no longer have to be a computer genius to use a computer. The most popular uses for home computers now include games, word processing, spreadsheets, education, and graphics. Graphic software packages for home computers like the Commodore 64 are becoming more and more powerful.

To create your own masterpiece of art with a graphic input device such as a joystick, light pen, track-ball, or graphic tablet can take several hours, and the results are highly dependent on your talent as an artist. Suppose you would like to include a more realistic picture of you, a relative, or a pet in a Basic program you are writing. If you lack the artistic talent to draw these pictures, all is not lost. You can input pictures to your computer through an electronic scanning device.

In this article, I'll describe the interface for a machine that can read any picture from a piece of paper and translate the picture to signals that your computer can handle. The machine is a facsimile machine, commonly referred to as FAX.

What is a FAX?

The facsimile machine is quite common in the business world. It is used to transfer a page of information (usually 8½ by 11 inches) over the phone line. At the transmitting end, a sheet of paper with text, graphics, or whatever, is fed into the machine. After a few minutes of whirring sounds, the paper comes back out of the machine. At the receiving end, the page image is reconstructed on a thermal printing device. The two FAX machines are connected to each other by modems in very much the same way that two computers communicate over phone lines.

FAX machines have been used to transmit both text and graphics. With the advent of low cost computers, however, it is now becoming quicker and cheaper to send text from one point to another by purely digital means. FAX machines are still popular and will always be used for special applications (AT&T still says a FAX is the only way to transmit hand-drawings, signed legal documents, etc.), but more and more companies are replacing their FAX networks with computer networks for text transmission.

The result of this change-over in technology is that businesses are now dumping used FAX machines into the surplus market. These machines, which cost up to $4000 new, can now be obtained for less than $200. Used FAXs in good working condition are quite a bargain and can be obtained from dealers of used office equipment and large electronic/computer surplus dealers.

Some Facts about FAX

A FAX machine is actually two machines in one. The transmitter feeds in a sheet of paper, scans it, translates the image to an electrical signal, modulates the signal, and sends it over a telephone line. This is the part we're interested in. The receiver takes the telephone signal, demodulates it, and translates the electrical signal to an image on a fresh piece of paper. We are not interested in the receiver end, although it can be used for a very slow, low quality printer. (Note – in most FAX machines, looping the output signal of the transmitter to the input of the receiver will turn the machine into a copying machine.)

There are probably just as many FAX "standards" as there are companies that make the machines. The signal can be amplitude modulated by a carrier of constant frequency, or it can be frequency modulated, giving a constant amplitude saw-tooth signal in which the frequency varies with brightness level of the scan. The signal can be digital in nature (only two levels: black and white; commonly used for text), or the signal can be analog, in which an infinite variation in gray levels are possible. An analog type signal is required for pictures. Various scan rates are used, from a fast 5 scan lines per second to 2 scans per second. In addition, the vertical resolution can vary from about 80 to over 200 scan lines per inch.

For our purposes, what standard should be used? Since the primary purpose is to digitize pictures, we will need an analog signal. Since most home computers can easily keep up with the scan rates involved by using machine language routines, we should use the fastest scan rate available. Another consideration is deciding between AM versus FM signal modulation. FM will reduce the amount of noise in the picture, but a few pixels of noise are not really noticeable in a digitized picture.

Luckily, the machine I obtained had a multitude of switches that could be used for just about any standard. The machine is a Burroughs DEX 4100, which I currently have set up in the following mode:

Machine	DEX mode
Speed	High
Res	Norm
ResX2	Off
TX Level	Norm
Doc	Photo
Simplex	On

The resulting output is an amplitude modulated signal with a carrier frequency of 1920Hz. The peak-to-peak signal varies from approximately 1 volt (black) to nearly 0 volts (white). The scan rate is exactly 5 Hz, giving 88 scan lines per inch. An entire 11 inch long sheet of paper is scanned by approximately 955 lines in a little over

three minutes.

The hardware and software presented in this article will work with a DEX 4100 FAX machine connected to a Commodore 64 computer. Other FAX machines, other transmission standards, and other 6502 computers can be used. However, other equipment will require revisions in the machine language software and possibly in the interface circuitry as well. But the techniques shown can be used as a starting point for any other configuration.

Some Design Considerations

Before jumping into the hardware and software design, let's think about how we will use the machine with our C-64. In the mode I chose to use, the FAX can digitize graphics at a resolution of over 50 dots/inch horizontally (along a scan line) and over 80 dots/inch vertically (from line to line). The most important criteria is that the aspect ratio of a picture is unchanged. A circle on the original should still look like a circle on the digitized image; it should not look like an oval. Another nice-to-have feature is that the picture will not have to be rotated 90 degrees to look at it. Most 8½ by 11 or 8 x 10 pictures are oriented vertically (like the page you are now reading); this means that we would only use about half the page. The C-64's graphic resolution is 320 horizontal, 200 vertical. 320 dots with about 50 dots/inch gives a little over 6 inches out of the total 8 or 8½ inch picture width. This is acceptable because the important picture content is almost always near the center. Due to the C-64 aspect ratio, the height of the digitized image on the original is a little over 4 inches. The FAX's vertical resolution is twice what we need, so we'll plan on using only every other scan line.

If you've been keeping up on the C-64 graphic articles, you know that there are two distinct bit-mapped modes: HIRES with 320 × 200 pixels and two colors, and MULTI with 160 × 200 pixels and four colors. Actually, the two or four color restrictions pertain to an 8 × 8 grid of dots and other 8 × 8 grids can have other color combinations. But since the scanning and digitization will be completely automatic, it is much simpler to restrict our pictures to two colors in HIRES mode and four colors in MULTI mode. However, we won't restrict our colors to black, white, and shades of gray. It is very desirable to be able to choose any color we want for any level of intensity.

This example of an image produced by FAX-64 has been reduced from the printout size of 7½ x 9.

Another feature that we would like to have is the ability to control where the top of the picture should be, by use of the keyboard. After the picture has been transferred to the computer and is displayed on the screen, we would like to save it to a disk file in a format that is compatible with other graphic aid and graphic print programs. This way, we can further enhance the pictures and get hard copies of them.

FAX to C-64 Interface

The signal coming out of the FAX is a relatively low voltage modulated analog signal. The interface must amplify the signal, demodulate it, and convert it to a digital signal (D/A converter). The extremely simple circuit I came up with, shown in Figure 1, will do all the required signal conversions.The five volt power supply in the Commodore 64 is used to power the interface. The signal coming from the FAX is divided by a 50Kohm potentiometer. This functions as a brightness control. The reduced signal is amplified by A1, one quarter of a low cost quad op-amp (IC1: LM3900). The output of A1 is inverted by A2. The outputs of both A1 and A2 are summed through diodes by A3, which acts as a full wave rectifier and demodulator. A4 inverts the signal and buffers it. The output of A4 varies from about two to four volts, in direct proportion to the brightness of the FAX scan at that instant.

IC2 (LM 339) is a quad comparator. A5, A6, and A7 are set to switch at about 3.75, 3.12, and 2.5 volts, respectively. The output of A4 is fed to all three comparators, which digitize the signal into four distinct levels from dark black to bright white. The comparator outputs are connected directly to three I/O bits of one of the C-64's CIA chips, through the USER port. (For computers other than the C-64, any PIA type I/O port could be used: 6820, 6821, 6520, 6522, etc.) The software driver will convert the three bits to a two bit binary code to signify gray level. For other computers that can display more gray levels, a more sophisticated analog to digital conversion would be required. But for the C-64 (and most inexpensive home computers), four distinct gray levels are most appropriate.

The capacitor attached to A3 demodulates the signal by filtering out the higher frequency carrier. The value shown results in a good compromise of low noise and acceptable resolution. For other standards, you may desire to change the capacitor values. If the horizontal resolution is found to be less than desired, reduce this value. If the output has too many light to dark transitions, smooth it out by increasing the value of the capacitor.

The required cost of the interface is almost ridiculously low. The connector that attaches to the C-64 is the most expensive part (about $4.00). Any type of layout is probably O.K., since fairly low frequencies are involved. Use shielded cable to the FAX machine (shield grounded). The most desirable configuration is to connect the PC board to the C-64 connector, so that the whole unit can plug into the computer's USER port.

Synchronization of the Signal

The translation of the signal from analog to digital was pretty straightforward. But at this point, a good question is "How in the world do you synchronize this signal to the computer?" This proved to be the most difficult aspect of the project. Initially, I used a very stable crystal controlled clock and divider chain. It was impossible to adjust the timing so that the image was stationary on the screen. A vertical line from the FAX would drift as much as 10 to 12 pixels to the left or right on the screen image. Next, I tried a phase lock loop oscillator, synchronized to the power line (60Hz). This was even worse; the vertical line ended up somewhat sinusoidal.

I tried to use the modulation frequency of the FAX itself (1920Hz), but this oddball frequency was not acceptable. It required a conversion to another frequency and a phase locked loop, since on white scenes, the modulated signal dropped to zero. This technique proved to be overkill and needlessly complex.

Another way to do it is to lock onto the picture signal itself with software. A representation of the demodulated signal (the output of A4) is shown in Figure 2. If an 8½ inch piece of paper is centered in the machine, the scan will give black guard bands off the edges. Between these black bands is a white

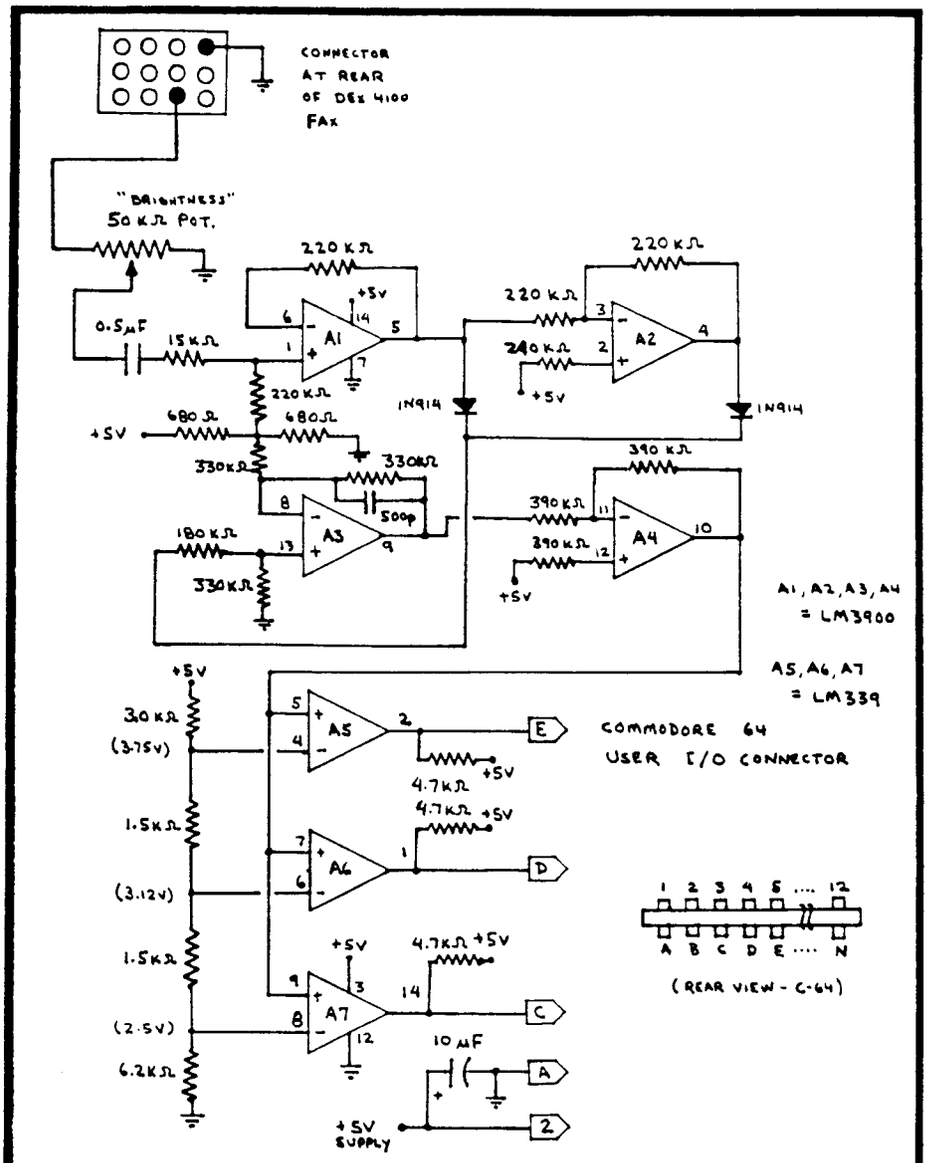

Figure 1: Interface Schematic

Listing 1

```
00001  0000              ;**********************************
00002  0000              ;*  FAX DRIVER FOR C-64           *
00003  0000              ;*  INPUTS THROUGH USER PORT      *
00004  0000              ;*                                *
00005  0000              ;*  M. J. KERYAN   9-04-84        *
00006  0000              ;**********************************
00007  0000              ;
00008  0000              PL      = $FD           ;PAGE ZERO
00009  0000              PH      = $FE           ; POINTERS AND
00010  0000              TEMP    = $FB           ; TEMPORARY
00011  0000              TEMPEV  = $FC           ; REGISTERS
00012  0000              ;
00013  0000              DATAIN  = $DD01         ;INPUT PORT
00014  0000              ICR     = $DD0D         ;INTER. CONTROL
00015  0000              ;
00016  0000              LTAB    = $4300         ;THIS TABLE IS
00017  0000              LTABA   = $43D0         ; USED TO
00018  0000              HTAB    = $4400         ; CONSTRUCT
00019  0000              HTABA   = $44D0         ; ADDRESSES
00020  0000              ;
00021  0000              *       = $4500
00022  4500              ;
00023  4500  78          NEWNMI  SEI             ;TURN OFF INTER.
00024  4501  2C 0D DD            BIT ICR         ;FAX INTERRUPT?
00025  4504  30 01               BMI SAVREG
```

sync pulse. Since the scan rate is constant (1 scan line every 0.2 seconds), the width of the sync pulse is constant. I decided to use the white sync pulse, followed by the black guard band, to sync the picture. This proved to be very stable, the only noticable by-product being a plus or minus one pixel uncertainty. Since I use the FAX mostly for pictures, this one pixel uncertainty is usually undetectable.

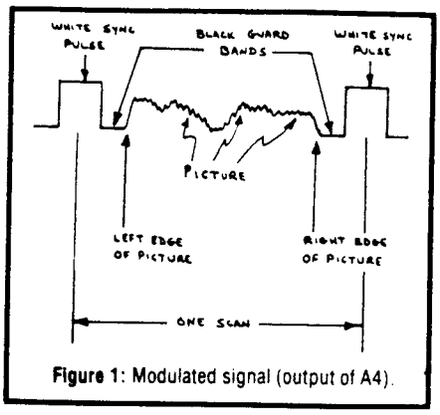

Figure 1: Modulated signal (output of A4).

The dot clock was generated by software. By doing so much in software, we have significantly reduced the compexity and cost of the interface. That's the good news. The bad news is, of course, that the software required to support the hardware is quite complex.

So far, we learned how a facsimile machine (FAX) works and we looked at a simple interface circuit that can be used to connect a FAX machine to a home computer, such as a Commodore 64. Before jumping into the software, an overview of the operation is helpful.

The CIA integrated circuit (6526) in the C-64 is used as a parallel input port to accept three bits of digitized information from the interface circuit. In a completely different application, the timer in the CIA is used as a clock signal. The clock is used to generate Non-Maskable Interrupts (NMI) at a frequency of approximately 3000Hz. During a scanning operation, everytime a NMI occours, data is sampled from the input port, converted to a pixel (picture element), and stored in graphic memory. Since this operation happens in the background, we can have a Basic program and even another machine language program running at the same time. This foreground/background mode of operation greatly simplifies the programming.

```
00026  4506  40          RTI              ;NO, IGNORE IT
00027  4507  48    SAVREG PHA
00028  4508  8A          TXA
00029  4509  48          PHA
00030  450A  98          TYA
00031  450B  48          PHA
00032  450C  EE F8 46     INC COUNTL       ;ADD 1 TO
00033  450F  D0 03        BNE N0           ; COUNTERS
00034  4511  EE F9 46     INC COUNTH
00035  4514  EE FA 46 N0  INC COUNT8       ;COUNT8 COUNTS
00036  4517  AD FA 46     LDA COUNT8       ; PULSES BY 8
00037  451A  C9 08        CMP #$08         ;WHEN = 8
00038  451C  D0 08        BNE SYNC         ; COLUMN COUNT
00039  451E  A9 00        LDA #$00         ; IS INCREMENTED
00040  4520  8D FA 46     STA COUNT8
00041  4523  EE FC 46     INC COLUMN
00042  4526               ;
00043  4526               ; SYNCFLG IS A FLAG TO DENOTE
00044  4526               ;  STATE OF SYNCHRONIZATION:
00045  4526               ;   = 128 OR HIGHER -- IN SYNC
00046  4526               ;   = 1 TO 127 -- PHASING MODE
00047  4526               ;   = 0 -- OUT OF PHASE
00048  4526               ;
00049  4526  AD FF 46 SYNC  LDA SYNCFL      ;IS FLAG >127?
00050  4529  30 58        BMI N1           ;YES, PHASED
00051  452B  D0 42        BNE LOCKED       ;NO, LOCKING?
00052  452D  AD 01 DD     LDA DATAIN       ;NO, LETS GET
00053  4530  29 07        AND #$07         ;IN PHASE THEN
00054  4532  C9 07        CMP #$07         ;DATA = BLACK?
00055  4534  F0 14        BEQ LASTBL       ;YES, ....
00056  4536  A5 FC        LDA TEMPEV       ;NO, WAS LAST
00057  4538  C9 07        CMP #$07         ;ONE BLACK?
00058  453A  F0 05        BEQ ZWHT         ;YES, .....
00059  453C  E6 FB        INC TEMP         ;NO, MORE WHITE
00060  453E  4C 80 45     JMP LRT
00061  4541  A9 01    ZWHT  LDA #$01
00062  4543  85 FB        STA TEMP         ;1 WHITE
00063  4545  85 FC        STA TEMPEV       ;LAST = WHITE
00064  4547  4C 80 45     JMP LRT
00065  454A  A5 FC LASTBL LDA TEMPEV       ;LAST DATA
00066  454C  C9 07        CMP #$07         ;WAS IT BLACK?
00067  454E  D0 0B        BNE CHKWH        ;NO, ......
00068  4550  A9 00 WHZERO LDA #$00         ;YES ZERO WHITE
00069  4552  85 FB        STA TEMP         ;COUNTER
00070  4554  A9 07        LDA #$07         ;MAKE LAST ONE
00071  4556  85 FC        STA TEMPEV       ; BLACK
00072  4558  4C 80 45     JMP LRT
00073  455B  A5 FB CHKWH  LDA TEMP         ;WHITE COUNTER
00074  455D  C9 4C        CMP #76          ; <76?
00075  455F  90 EF        BCC WHZERO       ;YES, WAIT
00076  4561  C9 50        CMP #80          ; >79?
00077  4563  B0 EB        BCS WHZERO       ;YES, PAST IT
00078  4565  A9 65        LDA #101         ;A HIT! NOW
00079  4567  8D FF 46     STA SYNCFL       ;SET TO LOCKED
00080  456A  85 FB        STA TEMP         ;COUNT FROM 48
00081  456C  4C 80 45     JMP LRT
00082  456F  C6 FB LOCKED DEC TEMP         ;IS COUNTER DOWN
00083  4571  D0 0D        BNE LRT          ;TO ZERO?
00084  4573  A9 FF        LDA #$FF         ;YES, SET SYNCFL
00085  4575  8D FF 46     STA SYNCFL       ;TO SCAN
00086  4578  A9 FF        LDA #$FF         ;RESET COUNTERS
00087  457A  8D FB 46     STA LINE         ; THROUGH CODE
00088  457D  4C C4 45     JMP N2           ; AT N2
00089  4580  4C F2 46 LRT  JMP RETURN
00090  4583  AD F9 46 N1   LDA COUNTH
00091  4586  C9 04        CMP #$04         ;HI BYTE <4?
00092  4588  90 6B        BCC N4           ;YES, BRANCH
00093  458A  AD F8 46     LDA COUNTL
00094  458D  C9 B0        CMP #$B0         ;COUNT>1199?
00095  458F  B0 33        BCS N2           ;YES, MAX COUNT
00096  4591  C9 45 KSYNC  CMP #69          ;IS COUNTER
00097  4593  90 2C        BCC KRT          ;WITHIN LIMITS?
00098  4595  C9 51        CMP #81
00099  4597  B0 28        BCS KRT
00100  4599  AD 00 47     LDA CHKSFL       ;SHOULD WE
00101  459C  D0 23        BNE KRT          ;CHECK FOR SYNC?
00102  459E  AD 01 DD     LDA DATAIN       ;YES, GET DATA
00103  45A1  29 07        AND #$07
00104  45A3  C9 02        CMP #$02         ;IS IT DARK?
00105  45A5  B0 07        BCS K1           ;YES, ....
00106  45A7  A9 01        LDA #$01         ;NO, MAKE LAST
00107  45A9  85 FC        STA TEMPEV       ;LIGHT
00108  45AB  4C C1 45     JMP KRT
```

Machine Langauage FAX Driver

The assembler code for the machine language program is shown in Listing 1. The first thing to describe is the new NMI routine. The pointers for this routine are poked into memory and activated by a Basic program described later. NEWNMI first checks to see if the NMI actually came from the CIA chip. If so, all registers are saved. The program counts each NMI (each dot) by eight because eight dots make up a byte of screen data.

A flag is used to denote the state of synchronization. If the flag is 0 (initial state), the signal is out of sync. If the flag is between 1 and 127, the program goes into a special phasing mode. If >127, the flag denotes that sync is established. We'll look at each sync mode separately.

If out of sync, the program will look for a string of white bytes that are between 76 to 80 dots wide. This string must be bounded on both sides by black dots. If any dot is out of sequence, this routine will reset and continue to look for this sequence. This white area is the sync pulse described previously. The length (76-80 dots) is dependent on the machine scan speed and software timer period. Any change in these will require a new window size. Once the sync pulse is found, the program changes the sync flag so that operation will go to the special phasing Mode (LOCKED). A count of 101 is stored into a counter which is decremented by each NMI (each dot). At this point, the correct phase is established, and we are at the left margin of a picture. The flag is then changed to denote that sync is established and counters are zeroed for the vertical line number, the horizontal count, and the horizontal byte number (column).

If the NMI routine is entered while in sync, it first checks to see if 1200 dots have occurred. If so, then one complete scan line (actually two physical scans since we ignore alternate scan data) is completed and we are then at the end of a line. We use this opportunity to check the keyboard for the 'T' key. T is pressed when you want the picture started at the top again, so the line number is zeroed. At the end of the 200th line, the picture is complete, so the routine kills itself by disabling FAX interrupts (see N3).

```
00109  45AE  A5 FC       K1     LDA TEMPEV      ;IS LAST DARK?
00110  45B0  C9 02              CMP #$02
00111  45B2  90 05              BCC K2          ;NO, ....
00112  45B4  85 FC              STA TEMPEV      ;YES, MAKE SURE
00113  45B6  4C C1 45           JMP KRT         ;DARK NOW
00114  45B9  A9 4B       K2     LDA #75         ;SYNC IT TO
00115  45BB  8D F8 46           STA COUNTL      ;A COMMON POINT
00116  45BE  8D 00 47           STA CHKSFL      ;SET FLAG
00117  45C1  4C F2 46     KRT   JMP RETURN
00118  45C4  A9 00       N2     LDA #$00        ;ZERO OUT
00119  45C6  8D F8 46           STA COUNTL      ; COUNTERS
00120  45C9  8D F9 46           STA COUNTH
00121  45CC  8D FA 46           STA COUNT8
00122  45CF  8D FC 46           STA COLUMN
00123  45D2  8D 00 47           STA CHKSFL
00124  45D5  EE FB 46           INC LINE        ;GO DOWN 1 LINE
00125  45D8  AD FB 46           LDA LINE
00126  45DB  C9 C8              CMP #200        ;LINES>199?
00127  45DD  B0 0E              BCS N3          ;YES, BRANCH
00128  45DF  A5 C5              LDA $C5         ;CURRENT KEY
00129  45E1  C9 16              CMP #22         ;IS IT 'T'
00130  45E3  D0 05              BNE NRT         ; FOR 'TOP'?
00131  45E5  A9 00              LDA #$00        ;YES, START AT
00132  45E7  8D FB 46           STA LINE        ; TOP
00133  45EA  4C 27 46     NRT   JMP ACTIVE      ;NO, START LINE
00134  45ED  A9 7F       N3     LDA #$7F        ;DISABLE FAX
00135  45EF  8D 0D DD           STA ICR         ; INTERRUPTS
00136  45F2  4C F2 46           JMP RETURN      ; FOR NOW
00137  45F5  C9 01       N4     CMP #$01        ;HI BYTE <1?
00138  45F7  90 2E              BCC ACTIVE      ;YES, SCREEN
00139  45F9  C9 02              CMP #$02        ;        >1?
00140  45FB  B0 07              BCS N5          ;IF SO, IGNORE
00141  45FD  AD F8 46           LDA COUNTL
00142  4600  C9 40              CMP #$40        ;COUNT <$0140?
00143  4602  90 23              BCC ACTIVE      ;YES, SCREEN
00144  4604  A5 C5       N5     LDA $C5         ;CURRENT KEY
00145  4606  C9 0D              CMP #13         ;IS IT 'S' FOR
00146  4608  D0 1A              BNE N6          ; 'SYNC'?
00147  460A  A9 00              LDA #$00        ;RESTART ALL
00148  460C  8D FF 46           STA SYNCFL
00149  460F  8D 00 47     NSTART STA CHKSFL
00150  4612  8D F8 46           STA COUNTL
00151  4615  8D F9 46           STA COUNTH
00152  4618  8D FA 46           STA COUNT8
00153  461B  8D FB 46           STA LINE
00154  461E  8D FC 46           STA COLUMN
00155  4621  4C 50 45           JMP WHZERO
00156  4624  4C F2 46     N6    JMP RETURN      ;IGNORE PULSE
00157  4627                     ;
00158  4627                     ; IN THE ACTIVE SCAN AREA, FIRST
00159  4627                     ;  CHANGE THE 3 BIT DATA TO A TWO
00160  4627                     ;  BIT BINARY CODE.  THEN SAVE ODD
00161  4627                     ;  DATA AND COMBINE THEM WITH EVEN
00162  4627                     ;  DATA SAMPLES.  WHEN IN MULTI-
00163  4627                     ;  COLOR MODE, AVERAGE THE TWO.
00164  4627                     ;
00165  4627  AD 01 DD  ACTIVE LDA DATAIN        ;GET DATA
00166  462A  29 07              AND #$07        ;MASK FOR 3 BITS
00167  462C  C9 02              CMP #$02        ;DATA <2?
00168  462E  90 0A              BCC TWOBIT      ;YES, 0 OR 1 OK
00169  4630  C9 04              CMP #$04        ;      >3?
00170  4632  B0 04              BCS WHITE       ;YES, BRIGHTEST
00171  4634  A9 02              LDA #$02        ;LEVEL = 2
00172  4636  D0 02              BNE TWOBIT
00173  4638  A9 03       WHITE  LDA #$03        ;LEVEL = 3
00174  463A  85 FB       TWOBIT STA TEMP        ;SAVE DATA
00175  463C  AD F8 46           LDA COUNTL      ;IS COUNTER
00176  463F  29 01              AND #$01        ;EVEN OR ODD?
00177  4641  D0 07              BNE ODD         ;BRANCH ON ODD
00178  4643  A5 FB              LDA TEMP        ;IF EVEN THEN
00179  4645  85 FC              STA TEMPEV      ;SAVE TILL NEXT
00180  4647  4C F2 46           JMP RETURN      ;TIME (ODD)
00181  464A  AD 01 47     ODD   LDA MODE        ;MULTICOLOR OR
00182  464D  F0 09              BEQ HIRES       ;HIRES MODE?
00183  464F  A5 FB       MULTI  LDA TEMP        ;MULTI MODE
00184  4651  18                 CLC             ;HERE, WE'LL
00185  4652  65 FC              ADC TEMPEV      ;AVERAGE TWO
00186  4654  4A                 LSR A           ;CONSECUTIVE
00187  4655  4C 63 46           JMP CALCBT      ;BYTES
00188  4658  A5 FC       HIRES  LDA TEMPEV      ;HIRES MODE
00189  465A  29 02              AND #$02        ;PLACE THE TWO
00190  465C  85 FC              STA TEMPEV      ;BITS IN THE
00191  465E  A5 FB              LDA TEMP        ;CORRECT ORDER
00192  4660  4A                 LSR A           ;(PRIOR = HIGH
```

During the 'dead' part of the scan, which is the physical scan line that we ignore, the keyboard is looked at again, this time for the 'S' key. On very rare occasions, a glitch may destroy the synchronization. The S key is used to start everything over again to re-establish sync.

If the sync is established, and we are in the active scan area (dots 0 to 319), the program jumps to ACTIVE. Here the data is sampled from the three input lines and converted to a two bit binary code: 00, 01, 10, or 11. Next, the mode of operation is looked at. If we are in HIRES mode, then we only want two levels of intensity for each dot. If the MULTIcolor mode is desired, then we will look at two consecutive dots, average them, and give the corresponding two-bit code for the average intensity level of the two dots. In either case, two bits are used to update the screen in the active scan area.

The addresses for the bit-map area are determined from a set of lookup tables (see Listing 2). These addresses are constructed based on the vertical line number (0-199) and the horizontal column number (0-39). The new two bits are placed at the correct bit locations into the byte of data, and this byte is stored back in the 8K bit map memory area. Since there are four possible places to put these two bits, there are four small routines for this: B0, B2, B4, and B6.

You can see that the NMI routine actually does quite a bit. It handles all the synchronization of the FAX, inputs the scan data, checks the keyboard for S or T keys, keeps track of the screen locations, and handles all the screen writing in either HIRES or MULTI modes.

Other Machine Language Utilities

Listing 1 also shows a few more utility programs. These are not part of the FAX driver but are instead called by SYS statements from our Basic program. First is a routine to clear the 8K bit-map area of memory. Also included are routines to clear the 1K areas for the screen and color memory. Actually, with a POKE from Basic, these routines can change the colors to any desired. A routine (SAVE) is included to move the different memory areas to other areas that are com-

```
00193  4661  05 FC        ORA TEMPEV      ;CURRENT = LOW)
00194  4663  8D FD 46  CALCBT STA TEMP1     ;SAVE IT FOR NOW
00195  4666  AD FC 46     LDA COLUMN      ;IS COLUMN #
00196  4669  C9 28        CMP #40         ; <40?
00197  466B  90 03        BCC SCR0        ;YES, GO ON
00198  466D  4C F2 46     JMP RETURN      ;OTHERWISE EXIT
00199  4670  A8          SCR0   TAY            ;SAVE COL Y REG.
00200  4671  AE FB 46     LDX LINE        ;LINE# IN X REG.
00201  4674  BD 00 43     LDA LTAB,X      ;CONSTRUCT
00202  4677  85 FD        STA PL          ;VIDEO ADDRESS
00203  4679  BD 00 44     LDA HTAB,X      ;FROM X=LINE
00204  467C  85 FE        STA PH          ; (0-199)
00205  467E  B9 D0 43     LDA LTABA,Y
00206  4681  18           CLC             ;AND Y=HORIZ.
00207  4682  65 FD        ADC PL          ;BYTE (0-39)
00208  4684  85 FD        STA PL
00209  4686  90 02        BCC SCR1
00210  4688  E6 FE        INC PH
00211  468A  B9 D0 44  SCR1   LDA HTABA,Y
00212  468D  18           CLC
00213  468E  65 FE        ADC PH
00214  4690  85 FE        STA PH
00215  4692  A0 00        LDY #$00        ;FINALLY, GET
00216  4694  B1 FD        LDA (PL),Y      ;BYTE FROM SCREEN
00217  4696  8D FE 46     STA TEMP2       ;HOLD IT
00218  4699  AD F8 46     LDA COUNTL      ;FIND MOD(8) OF
00219  469C  29 07        AND #$07        ; PULSE
00220  469E  C9 02        CMP #$02        ;>1?
00221  46A0  B0 14        BCS B2          ;YES, BRANCH
00222  46A2  AD FE 46  B0     LDA TEMP2
00223  46A5  29 3F        AND #$3F        ;MASK= 00111111
00224  46A7  8D FE 46     STA TEMP2
00225  46AA  AD FD 46     LDA TEMP1
00226  46AD  0A           ASL A           ;MOVE THE TWO
00227  46AE  0A           ASL A           ;BITS TO THE
00228  46AF  0A           ASL A           ;TWO HIGH BITS
00229  46B0  0A           ASL A           ;7 AND 6
00230  46B1  0A           ASL A
00231  46B2  0A           ASL A
00232  46B3  4C EB 46     JMP B8
00233  46B6  C9 04     B2     CMP #$04        ;>3?
00234  46B8  B0 12        BCS B4          ;YES, BRANCH
00235  46BA  AD FE 46     LDA TEMP2
00236  46BD  29 CF        AND #$CF        ;MASK= 11001111
00237  46BF  8D FE 46     STA TEMP2
00238  46C2  AD FD 46     LDA TEMP1
00239  46C5  0A           ASL A           ;MOVE THE TWO
00240  46C6  0A           ASL A           ;BITS TO THE
00241  46C7  0A           ASL A           ;BITS NUMBERED
00242  46C8  0A           ASL A           ;5 AND 4
00243  46C9  4C EB 46     JMP B8
00244  46CC  C9 06     B4     CMP #$06        ;>5?
00245  46CE  B0 10        BCS B6          ;YES, BRANCH
00246  46D0  AD FE 46     LDA TEMP2
00247  46D3  29 F3        AND #$F3        ;MASK= 11110011
00248  46D5  8D FE 46     STA TEMP2
00249  46D8  AD FD 46     LDA TEMP1
00250  46DB  0A           ASL A           ;SHIFT THEM TO
00251  46DC  0A           ASL A           ;BITS 3 AND 2
00252  46DD  4C EB 46     JMP B8
00253  46E0  AD FE 46  B6     LDA TEMP2
00254  46E3  29 FC        AND #$FC        ;MASK= 11111100
00255  46E5  8D FE 46     STA TEMP2
00256  46E8  AD FD 46     LDA TEMP1       ;ONLY THESE BITS
00257  46EB  0D FE 46  B8     ORA TEMP2       ;AFFECT DATA
00258  46EE  A0 00        LDY #$00
00259  46F0  91 FD        STA (PL),Y      ;CHANGE SCREEN
00260  46F2  68        RETURN PLA             ;RESTORE
00261  46F3  A8           TAY             ; REGISTERS
00262  46F4  68           PLA
00263  46F5  AA           TAX
00264  46F6  68           PLA
00265  46F7  40           RTI
00266  46F8           ;
00267  46F8  00        COUNTL .BYTE 0
00268  46F9  00        COUNTH .BYTE 0
00269  46FA  00        COUNT8 .BYTE 0
00270  46FB  00        LINE   .BYTE 0
00271  46FC  00        COLUMN .BYTE 0
00272  46FD  00        TEMP1  .BYTE 0
00273  46FE  00        TEMP2  .BYTE 0
00274  46FF  00        SYNCFL .BYTE 0
00275  4700  00        CHKSFL .BYTE 0
00276  4701  00        MODE   .BYTE 0
```

patible with popular graphics programs. Here we move the 8K bit-map area starting at $2000 to $6000 + . The 1K screen area starting at $0400 is moved to two locations, $5C00 and $7F40. The 1K color memory starting at $D800 is moved to $8328, and the background color from $D021 to $8710. The reason for these memory moves are to prepare for a disk save routine. The above locations are compatible with two packages, "DOODLE", a graphics program by Omni Unlimited, and "Koalapainter", by Audio Light. DOODLE is used for HIRES pictures, and KOALA for MULTIcolor pictures.

The DISKSA routine will create a disk file in either mode, depending on the state of the mode flag. To use this routine, the file name and length of the name have to be previously stored in memory.

Basic Program for FAX Driver

Listing 3 is a Basic program that is used to control the machine language programs. First it reads into memory the ML part ("FAX64.ML") and the table of Listing 2 ("TABLE"). Then the top of memory is set to avoid conflicts with the graphics.

The main menu allows four options: FAX scan, Display last scan, Save scan to disk, or Quit. Obviously, the F option is chosen the first time. You are then given the choice of a HIRES scan (only two colors) or a MULTIcolor scan (four colors). Then some other commands are shown and you are instructed to start the FAX machine.

POKEs are made to start the interrupt routine (NMI) and the software timer, as well as to configure the screen for graphics. At this point, the NMI routine is active in the background. The Basic program is in a do-nothing state, checking the keyboard for Q to quit or for color change keys.

If MULTI mode is chosen, the colors can be changed either during a scan or after. The four function keys can be used to change any of the four colors. F1 is used for the brightest level (usually white), F3 for the next, etc. With these four keys, any color combination is possible. The number keys are used to select any of 10 preset color combinations. The '2' key selects shades of white (gray, black), the '3' key is used for shades of red, etc. Also, the 'C' key can be used to rotate from 1 to 2

```
00277  4702                    ;
00278  4702  00          LENGTH .BYTE $00        ;FOR DISKSA
00279  4703  00          NAME   .BYTE 0,0,0,0,0,0,0,0
00279  4704  00
00279  4705  00
00279  4706  00
00279  4707  00
00279  4708  00
00279  4709  00
00279  470A  00
00280  470B  00          CONTD  .BYTE 0,0,0,0,0,0,0,0
00280  470C  00
00280  470D  00
00280  470E  00
00280  470F  00
00280  4710  00
00280  4711  00
00280  4712  00
00281  4713                    ;
00282  4713               SAVEKN =    65496       ;KERNAL
00283  4713               SETLFS =    65466       ; ROUTINES
00284  4713               SETNAM =    65469
00285  4713                    ;
00286  4713                    ;       SUBROUTINES FOR CLEAR
00287  4713                    ;       SCREEN, SET COLORS
00288  4713                    ;
00289  4713  A0 20         CLRBIT LDY #$20
00290  4715  8C 43 47             STY LOOPCL+2
00291  4718  A9 AA                LDA #$AA
00292  471A  4C 3F 47             JMP CLEAR
00293  471D                    ;
00294  471D  AD 01 47      CLRCOL LDA MODE
00295  4720  D0 0A                BNE CLRMUL
00296  4722  A9 01         CLRHIR LDA #$01
00297  4724  A0 04         CLR1   LDY #$04
00298  4726  8C 43 47             STY LOOPCL+2
00299  4729  4C 3F 47             JMP CLEAR
00300  472C                    ;
00301  472C  A9 01         CLRMUL LDA #$01
00302  472E  8D 21 D0             STA $D021
00303  4731  A9 FC                LDA #$FC
00304  4733  20 24 47             JSR CLR1
00305  4736  A9 00                LDA #$00
00306  4738  A0 D8                LDY #$D8
00307  473A  8C 43 47             STY LOOPCL+2
00308  473D  A0 04                LDY #$04
00309  473F  A2 00         CLEAR  LDX #$00
00310  4741  9D 00 04     LOOPCL STA $0400,X
00311  4744  E8                   INX
00312  4745  D0 FA                BNE LOOPCL
00313  4747  EE 43 47             INC LOOPCL+2
00314  474A  88                   DEY
00315  474B  D0 F4                BNE LOOPCL
00316  474D  60                   RTS
00317  474E                    ;
00318  474E  A0 20         SAVE   LDY #$20        ;8K BIT-MAP
00319  4750  8C B3 47             STY MOVE1+2     ; FROM $2000+
00320  4753  A9 60                LDA #$60        ; TO   $6000+
00321  4755  8D B6 47             STA MVTO+2
00322  4758  A9 00                LDA #$00
00323  475A  8D B2 47             STA MOVE1+1
00324  475D  8D B5 47             STA MVTO+1
00325  4760  20 AF 47             JSR MOVE
00326  4763  A0 04                LDY #$04        ;1K SCREEN
00327  4765  8C B3 47             STY MOVE1+2     ; FROM $0400
00328  4768  A9 5C                LDA #$5C        ; TO   $5C00
00329  476A  8D B6 47             STA MVTO+2
00330  476D  A9 00                LDA #$00
00331  476F  8D B2 47             STA MOVE1+1
00332  4772  8D B5 47             STA MVTO+1
00333  4775  20 AF 47             JSR MOVE
00334  4778  A0 04                LDY #$04        ;1K SCREEN
00335  477A  8C B3 47             STY MOVE1+2     ; ALSO TO
00336  477D  A9 00                LDA #$00        ;       $7F40
00337  477F  8D B2 47             STA MOVE1+1
00338  4782  A9 7F                LDA #$7F
00339  4784  8D B6 47             STA MVTO+2
00340  4787  A9 40                LDA #$40
00341  4789  8D B5 47             STA MVTO+1
00342  478C  20 AF 47             JSR MOVE
00343  478F  A9 D8                LDA #$D8        ;1K COLOR
00344  4791  8D B3 47             STA MOVE1+2     ; FROM $D800
00345  4794  A9 00                LDA #$00        ; TO   $8328
00346  4796  8D B2 47             STA MOVE1+1
```

to 3, and so on. It should be noted that these color changes can be made while the machine is scanning since the program is running simultaneously with the NMI routine.

The Save option first moves the memory areas, turns on the alpha screen, and asks you for a file name. This name is then configured to be compatible with either KOALA or DOODLE, and the name and its length are POKED into memory. You are then instructed to place a diskette into the disk drive. You can change disks at this point, but be sure you use previously formatted disks. Then the ML Save routine is called and you see the menu again.

What Good is a FAX?

What can you do with the FAX? Well, actually, it can prove to be the best graphic input device that you can use with your home computer. You can capture an image of any picture into your machine. By creating a disk file of the picture, you can then add text, fill in color areas, or enhance the images with other graphic packages. You can dump these pictures to your printer with an appropriate printer dump program. And you can do it even if you are not very good at drawing.

Some Helpful Hints

Make sure the picture you feed into the FAX is of sufficient contrast and is not bathed in dark shadows. Do not attempt to use it to read in fine text—the interface is configured to reduce the resolution to that of C-64 graphics capability. Make sure the 'brightness' control is set up right so that the machine is putting out four different levels to your computer. To set it, make yourself a 'test pattern' with different gray levels, and digitize it in MULTI mode.

If you have more questions, suggestions, or have found a unique application for the FAX machine, write to me at 713 Locust Drive, Tallmadge, Ohio 44278. I can supply the C-64 FAX driver programs in Commodore 1541 disk format for $10. A FAX machine as used in this article can be obtained from Computer Products & Peripherals Unlimited, Box 204, Newton, New Hampshire 03858, for approx. $169. ■

```
00347  4799  A9 83        LDA #$83
00348  479B  8D B6 47     STA MVTO+2
00349  479E  A9 28        LDA #$28
00350  47A0  8D B5 47     STA MVTO+1
00351  47A3  A0 04        LDY #$04
00352  47A5  20 AF 47     JSR MOVE
00353  47A8  AD 21 D0     LDA $D021       ;1 BYTE $D021
00354  47AB  8D 10 87     STA $8710       ;    TO $8710
00355  47AE  60           RTS
00356  47AF
00357  47AF  A2 00     ;
00358  47B1  AD 00 04  MOVE  LDX #$00      ;MOVE
00359  47B4  8D 40 7F  MOVE1 LDA $0400     ; SUBROUTINE
00360  47B7  EE B2 47  MVTO  STA $7F40
00361  47BA  AD B2 47        INC MOVE1+1
00362  47BD  D0 03           LDA MOVE1+1
00363  47BF  EE B3 47        BNE MV1
00364  47C2  EE B5 47        INC MOVE1+2
00365  47C5  AD B5 47  MV1   INC MVTO+1
00366  47C8  D0 03           LDA MVTO+1
00367  47CA  EE B6 47        BNE MV2
00368  47CD  E8           MV2  INC MVTO+2
00369  47CE  D0 E1           INX
00370  47D0  88              BNE MOVE1
00371  47D1  D0 DE           DEY
00372  47D3  60              BNE MOVE1
00373  47D4                  RTS
00374  47D4  A2 08     ;
00375  47D6  A9 07     DISKSA LDX #$08      ;ROUTINE TO
00376  47D8  A0 00           LDA #$07       ; SAVE THE
00377  47DA  20 BA FF        LDY #$00       ; GRAPHICS
00378  47DD  AD 02 47        JSR SETLFS     ; TO DISK IN
00379  47E0  A2 03           LDA LENGTH     ; FORMATS:
00380  47E2  A0 47           LDX #<NAME     ;
00381  47E4  20 BD FF        LDY #>NAME     ; HIRES-
00382  47E7  AD 01 47        JSR SETNAM     ;   DOODLE
00383  47EA  F0 18           LDA MODE       ;
00384  47EC  A9 60           BEQ HIRESC     ; MULTI-
00385  47EE  85 FE           LDA #$60       ;   KOALA
00386  47F0  A2 11           STA PL+1
00387  47F2  A0 87           LDX #$11
00388  47F4  A9 00           LDY #$87
00389  47F6  85 FD     TOSAVE LDA #$00
00390  47F8  A9 FD           STA PL
00391  47FA  20 D8 FF        LDA #<PL
00392  47FD  B0 02           JSR SAVEKN
00393  47FF  A9 00           BCS ERR
00394  4801  85 FD           LDA #$00
00395  4803  60        ERR    STA PL
00396  4804  A9 5C           RTS
00397  4806  85 FE     HIRESC LDA #$5C
00398  4808  A2 00           STA PL+1
00399  480A  A0 80           LDX #$00
00400  480C  D0 E6           LDY #$80
00401  480E                  BNE TOSAVE
00402  480E              ;
                         .END

ERRORS = 00000


SYMBOL TABLE

SYMBOL VALUE
 ACTIVE   4627   B0       46A2   B2       46B6   B4       46CC
 B6       46E0   B8       46EB   CALCBT   4663   CHKSFL   4700
 CHKWH    455B   CLEAR    473F   CLR1     4724   CLRBIT   4713
 CLRCOL   471D   CLRHIR   4722   CLRMUL   472C   COLUMN   46FC
 CONTD    470B   COUNT8   46FA   COUNTH   46F9   COUNTL   46F8
 DATAIN   DD01   DISKSA   47D4   ERR      4801   HIRES    4658
 HIRESC   4804   HTAB     4400   HTABA    44D0   ICR      DD0D
 K1       45AE   K2       45B9   KRT      45C1   KSYNC    4591
 LASTBL   454A   LENGTH   4702   LINE     46FB   LOCKED   456F
 LOOPCL   4741   LRT      4580   LTAB     4300   LTABA    43D0
 MODE     4701   MOVE     47AF   MOVE1    47B1   MULTI    464F
 MV1      47C2   MV2      47CD   MVTO     47B4   N0       4514
 N1       4583   N2       45C4   N3       45ED   N4       45F5
 N5       4604   N6       4624   NAME     4703   NEWNMI   4500
 NRT      45EA   NSTART   460F   ODD      464A   PH       00FE
 PL       00FD   RETURN   46F2   SAVE     474E   SAVEKN   FFD8
 SAVREG   4507   SCR0     4670   SCR1     468A   SETLFS   FFBA
 SETNAM   FFBD   SYNC     4526   SYNCFL   46FF   TEMP     00FB
 TEMP1    46FD   TEMP2    46FE   TEMPEV   00FC   TOSAVE   47F4
 TWOBIT   463A   WHITE    4638   WHZERO   4550   ZWHT     4541
```

Listing 2. Table of Offsets for Screen Memory

```
Addr Data

4300 00 01 02 03 04 05 06 07 40 41 42 43 44 45 46 47
4310 80 81 82 83 84 85 86 87 c0 c1 c2 c3 c4 c5 c6 c7
4320 00 01 02 03 04 05 06 07 40 41 42 43 44 45 46 47
4330 80 81 82 83 84 85 86 87 c0 c1 c2 c3 c4 c5 c6 c7
4340 00 01 02 03 04 05 06 07 40 41 42 43 44 45 46 47
4350 80 81 82 83 84 85 86 87 c0 c1 c2 c3 c4 c5 c6 c7
4360 00 01 02 03 04 05 06 07 40 41 42 43 44 45 46 47
4370 80 81 82 83 84 85 86 87 c0 c1 c2 c3 c4 c5 c6 c7
4380 00 01 02 03 04 05 06 07 40 41 42 43 44 45 46 47
4390 80 81 82 83 84 85 86 87 c0 c1 c2 c3 c4 c5 c6 c7
43a0 00 01 02 03 04 05 06 07 40 41 42 43 44 45 46 47
43b0 80 81 82 83 84 85 86 87 c0 c1 c2 c3 c4 c5 c6 c7
43c0 00 01 02 03 04 05 06 07 00 00 00 00 00 00 00 00
43d0 00 08 10 18 20 28 30 38 40 48 50 58 60 68 70 78
43e0 80 88 90 98 a0 a8 b0 b8 c0 c8 d0 d8 e0 e8 f0 f8
43f0 00 08 10 18 20 28 30 38 00 00 00 00 00 00 00 00
4400 20 20 20 20 20 20 20 20 21 21 21 21 21 21 21 21
4410 22 22 22 22 22 22 22 22 23 23 23 23 23 23 23 23
4420 25 25 25 25 25 25 25 25 26 26 26 26 26 26 26 26
4430 27 27 27 27 27 27 27 27 28 28 28 28 28 28 28 28
4440 2a 2a 2a 2a 2a 2a 2a 2a 2b 2b 2b 2b 2b 2b 2b 2b
4450 2c 2c 2c 2c 2c 2c 2c 2c 2d 2d 2d 2d 2d 2d 2d 2d
4460 2f 2f 2f 2f 2f 2f 2f 2f 30 30 30 30 30 30 30 30
4470 31 31 31 31 31 31 31 31 32 32 32 32 32 32 32 32
4480 34 34 34 34 34 34 34 34 35 35 35 35 35 35 35 35
4490 36 36 36 36 36 36 36 36 37 37 37 37 37 37 37 37
44a0 39 39 39 39 39 39 39 39 3a 3a 3a 3a 3a 3a 3a 3a
44b0 3b 3b 3b 3b 3b 3b 3b 3b 3c 3c 3c 3c 3c 3c 3c 3c
44c0 3e 3e 3e 3e 3e 3e 3e 3e 00 00 00 00 00 00 00 00
44d0 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
44e0 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
44f0 01 01 01 01 01 01 01 01 00 00 00 00 00 00 00 00
```

LISTING 3. BASIC FAX DRIVER PROGRAM

```
10 REM**********************************
20 REM*                                *
30 REM*  FAX-DRIVER   M.J.KERYAN       *
40 REM*  FOR C-64     9-04-84          *
50 REM*                                *
60 REM**********************************
70 IF A=0 THEN A=1: LOAD " TABLE",8,1
80 IF A=1 THEN A=2: LOAD " FAX64.ML",8,1
90 POKE52,32:POKE56,32:POKE644,32: CLR
100 DIM C(9,3): CR=2
110 FOR I=0TO9: FOR J=1TO3: READ C(I,J): NEXT: NEXT
120 C1=18221: C2=18226: C3=18231
130 DATA 1,173,6, 15,148,0
140 DATA 1,252,0, 1,162,0
150 DATA 3,230,0, 2,164,6
160 DATA 1,213,0, 1,230,0
170 DATA 1,120,9, 1,169,0
180 REM  MENU
190 GOSUB 1410
200 PRINT"              <RON>FAX MENU<DWN><DWN>"
210 PRINT"        <F>   FAX SCAN
220 PRINT"<DWN>       <D>   DISPLAY LAST SCAN
230 PRINT"<DWN>       <S>   SAVE SCAN TO DISK
240 PRINT"<DWN>       <Q>   QUIT": PRINT
250 PRINT"        ?"
260 GET K$: IF K$<>"" THEN 260
270 GET K$: IF K$="" THEN 270
280 IF K$="F" THEN SC=1: GOTO 330
290 IF K$="Q" THEN GOTO 1340
300 IF K$="D" THEN 930
310 IF K$="S" THEN GOSUB 860: GOTO 1090
```

Watch For These Upcoming Articles

The following list is a sample of some of the interesting articles which are in process. Your suggestions for future articles are welcome.

- Interfacing a parallel printer through the Apple game port.
- Dumping the S-100 graphics card image to an Epson printer.
- Using bank switching for an extended CBIOS.
- Communicating with your computer over the phone line without a modem by using TONE CONTROL.
- Review of the Light Speed-100 256K S-100 Disk Simulator Kit.
- A $500 Superbrain Computer, the pros and cons of buying out of date used equipment.
- FORTH—Using the CREATE....DOES construct.
- Source code drivers for the NEC7220 graphics chip.
- Accessing the Apple II's graphics from within a CP/M program using a Z-80 card.
- Kit Building—soldering, desoldering, and repairing printed circuit boards.

Reviewers Needed

We are looking for qualified people to review technical programs and hardware for The Computer Journal. We do not need reviews of Lotus 1-2-3 or similar spreadsheets, wordprocessors, or general business type programs: we'll leave that to the general interest magazines. What we do need are reviews of compilers, assemblers, disassemblers, debuggers, programming utility libraries, scientific and engineering programs, data acquisition and analysis programs, operating system enhancements, and similar items which are used by programmers.

We are also interested in reviews of specialized hardware such as A/D and D/A interfaces, EPROM programmers, stepper motor controllers, and kits—but not most new computers or peripherals, unless there is some technical aspect of special interest to our readers.

We prefer reviews from people who are actually using the product rather than from someone who reviews many different products without using any one of them long enough to become completely familiar with all of its features. The reviews should be truthful and should tell it like it is, but the best reviews are the ones you write about products that you like and want to encourage others to use.

If you are interested in writing reviews, send us a short letter with your background and qualifications, and a phone number where you can be reached in the evening. Include products which you now have available for review, and also items which you would be interested in reviewing if we could obtain a review copy. ■

```
320 GOTO 260
330 PRINT"<DWN>ENTER: <0> FOR HIRES (BLACK/WHITE)"
340 PRINT"<DWN>     OR <1> FOR MULTI (4 COLOR LEVELS)"
350 GETK$: IFK$<>"" THEN 350
360 PRINT"<DWN>       ";:INPUT MODE:IF MODE<0 OR MODE>1
   THEN 330
370 PRINT"<CLR><DWN><RON>WHILE SCANNING, PRESS:"
380 PRINT"<DWN>         <T>   TO START AT TOP"
390 PRINT"<DWN>         <S>   TO SYNCHRONIZE & RESTART"
400 IF MODE>0 THEN PRINT"<DWN>         <C>   TO ROTATE COLORS"
410 IF MODE>0 THEN PRINT"<DWN>       <0-9>  TO CHANGE COLORS"
420 IF MODE>0 THEN PRINT"<DWN>      <F1-F7> TO CHANGE A
   COLOR"
430 PRINT"<DWN>         <Q>   TO QUIT"
440 PRINT"<DWN><DWN><DWN><RON>NOW START THE FAX MACHINE."
450 FOR I=1TO10000: NEXTI
460 SYS 18195: REM CLEAR 8K BIT-MAP
470 POKE 18177, MODE
480 POKE C1,C(CR,1): POKE C2,C(CR,2): POKE C3,C(CR,3)
490 IF KC>2 THEN POKE C1,CA: POKE C2,CB: POKE C3,CC
500 SYS 18205: REM SET COLORS
510 FOR I=18168TO18176: POKEI,0: NEXTI
520 POKE 53272,(PEEK(53272) OR 8)
530 POKE 53265,(PEEK(53265) OR 32)
540 IF MODE=0 THEN POKE 53270,8
550 IF MODE=1 THEN POKE 53270,24
560 POKE 792,0: POKE 793,69
570 POKE 56591,0: POKE 56579,0: POKE 56589,127
580 POKE 56582,84: POKE 56583,1: POKE 56591,23: POKE 56589,
   130
590 REM  NOW THE NMI ROUTINE HAS STARTED
600 GET K$: IF K$<>"" THEN 600
610 GET K$: IF K$="" THEN 610
620 IF K$="Q" OR K$="E" THEN SYS 18254: GOSUB 860: GOTO
   180
630 IF MODE<1 THEN 600
640 IF ASC(K$)>47 AND ASC(K$)<58 THEN KC=1: GOTO 680
650 IF K$="C" THEN KC=2: GOTO 710
660 IF K$="< F1>" OR K$="< F3>" OR K$="< F5>" OR K$="<
   F7>" THEN KC=3: GOTO 740
670 GOTO 600
680 CR=VAL(K$)
690 POKE C1,C(CR,1): POKE C2,C(CR,2): POKE C3,C(CR,3)
700 GOTO 850
710 CR=CR+1: IF CR>9 THEN CR=0
720 POKE C1,C(CR,1): POKE C2,C(CR,2): POKE C3,C(CR,3)
730 GOTO 850
740 IF K$<>"< F1>" THEN 770
750 CA=PEEK(C1)+1: IF CA>15 THEN CA=0
760 POKE C1,CA: GOTO 850
770 IF K$<>"< F3>" THEN 800
780 CB=(PEEK(C2)AND240)/16+1: IF CB>15 THEN CB=0
790 POKE C2,(CB*16)+(PEEK(C2)AND15): CB=PEEK(C2): GOTO
   850
800 IF K$<>"< F5>" THEN 830
810 CB=(PEEK(C2)AND15)+1: IF CB>15 THEN CB=0
820 POKE C2,(PEEK(C2)AND240)+CB: CB=PEEK(C2): GOTO 850
830 CC=PEEK(C3)+1: IF CC>15 THEN CC=0
840 POKE C3,CC: GOTO 850
850 SYS 18205: GOTO 600
860 REM RESET SCREEN TO ALPHA
870 POKE 53265,(PEEK(53265) AND 223)
880 POKE 53270,8: POKE 53272,21
890 SYS 64931: SYS 64789
900 SYS 65371
910 GOSUB 1410
920 RETURN
930 PRINT"<DWN><RON>WHILE VIEWING, PRESS:"
940 IF MODE>0 THEN PRINT"<DWN>         <C>   TO ROTATE COLORS"
950 IF MODE>0 THEN PRINT"<DWN>       <0-9>  TO CHANGE COLORS"
960 IF MODE>0 THEN PRINT"<DWN>      <F1-F7> TO CHANGE A
   COLOR"
970 PRINT"<DWN>         <Q>   TO QUIT"
980 FOR I=1TO4000: NEXTI
990 POKE 18177, MODE
1000 POKE C1,C(CR,1): POKE C2,C(CR,2): POKE C3,C(CR,3)
1010 IF KC>2 THEN POKE C1,CA: POKE C2,CB: POKE C3,CC
```

continued on page 31

BOOK SALE

Save 50 to 60%

Computer Communication Techniques
Howard W. Sams #21998
by E.G. Brooner and Phil Wells
Retail price $15.95

Introduces the reader to the principles of digital communications, protocols and standards, and describes practical uses and software for this purpose.

Microcomputer Database Management
Howard W. Sams #21875
by E. G. Brooner
Retail price $10.95

An understandable text on file handling techniques, such as file organization, sorting, and searching. Some practical applications.

While limited supply lasts—50% discount on either book, or 60% off on orders for two or more books.

Postpaid, cash or money order only.

COMLABS
Box 236
Lakeside, MT 59922

MICROCOMPUTERS AND INTERFACES



We have six single board computers, two video boards and interfaces for the IBM-PC and APPLE computers. You can use our products for security systems, heat control, light control, automated slide shows, irrigation systems, hydroponic systems, automated products, robot control just to name a few. Software available. For catalog call or write to:

JOHN BELL ENGINEERING, INC.
400 OXFORD WAY
BELMONT, CA 94002
(415) 592-8411

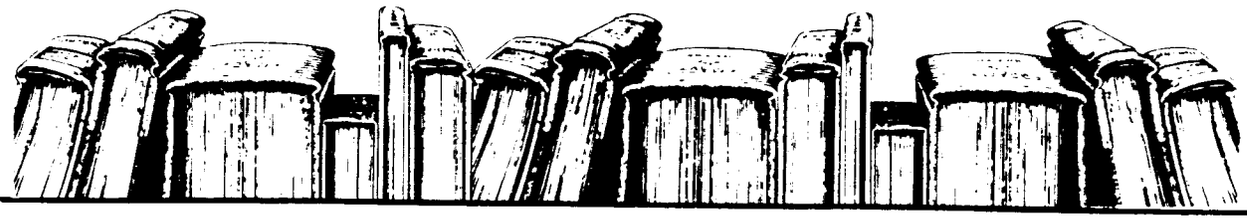

The Bookshelf

Soul of CP/M: Using and Modifying CP/M's Internal Features

Teaches you how to modify BIOS, use CP/M system calls in your own programs, and more! Excellent for those who have read *CP/M Primer* or who otherwise understand CP/M's outer-layer utilities. By Mitchell Waite. Approximately 160pages, 8x9½, comb. ©1983.....$18.95

The Programmer's CP/M Handbook

An exhaustive coverage of CP/M-80™, its internal structure and major components is presented. Written for the programmer, this volume includes subroutine examples for each of the CP/M system calls and information on how to customize CP/M – complete with detailed source codes for all examples. A dozen utility programs are shown with heavily annotated C-language source codes. An invaluable and comprehensive tool for the serious programmer. By Andy Johnson-Laird, 750 pages, 7½x9¼, softbound.....$21.95

Interfacing to S-100 (IEEE 696) Microcomputers

This book is a must if you want to design a custom interface between an S-100 microcomputer and almost any type of peripheral device. Mechanical and electrical design is covered, along with logical and electrical relationships, bus interconnections and more. By Sol Libes and Mark Garetz, 322 pages, 6½x9¼, softbound.....$16.95

Microprocessors for Measurement and Control

You'll learn to design mechanical and process equipment using microprocessor based "real time" computer systems. This book presents plans for prototype systems which allow even those unfamiliar with machine or assembly language to initiate projects. By D.M. Auslander and P. Sagues, 310 pages, 7 3/8x9 1/4, softbound.....$16.95

Understanding Digital Logic Circuits

A working handbook for service technicians and others who need to know more about digital electronics in radio, television, audio, or related areas of electronic troubleshooting and repair. You're given an overview of the anatomy of digital-logic diagrams and introduced to the many commercial IC packages on the market. By Robert G. Middleton, 392 pages, 5½x8½, softbound.....$18.95.

Real Time Programming: Neglected Topics

This book presents an original approach to the terms, skills, and standard hardware devices needed to connect a computer to numerous peripheral devices. It distills technical knowledge used by hobbyists and computer scientists alike to useable, comprehensible methods. It explains such computer and electronics concepts as simple and hierarchical interrupts, ports, PIAs, timers, converters, the sampling theorem, digital filters, closed loop control systems, multiplexing, buses, communication, and distributed computer systems. By Caxton C. Foster, 190 pages, 6¼x9¼, softbound.....$9.95

Interfacing Microcomputers to the Real World

Here is a complete guide for using a microcomputer to computerize the home, office, or laboratory. It shows how to design and build the interfaces necessary to connect a microcomputer to real world devices. With this book, microcomputers can be programmed to provide fast, accurate monitoring and control of virtually all electronic functions – from controlling houselights, thermostats, sensors, and switches, to operating motors, keyboards, and displays. This book is based on both the hardware and software principles of the Z80 microprocessor (found in several minicomputers, Tandy Corporation's famous TRS-80, and others). By Murray Sargent III and Richard Shoemaker, 288 pages, 6¼x9¼, softbound.....$15.55

Mastering CP/M

Now you can use CP/M to do more than just copy files. For CP/M users or systems programmers – this book takes up where our CP/M handbook leaves off. It will give you an in-depth understanding of the CP/M modules such as, CCP (Console Command Processor), BIOS (Basic Input/Output System), and BDOS (Basic Disk Operating System). Find out how to: incorporate additional peripherals with your system, use console I/O, use the file control block and much more. This book includes a special feature – a library of useful macros. A comprehensive set of appendices is included as a practical reference tool. Take advantage of the versatility of your operating system! By Alan R. Miller, 398 pages, 6"x9", softbound.....$16.95

FORTH Tools, Volume One

FORTH Tools is a comprehensive introduction to the new international FORTH-83 Standard and all its extensions. It gives careful treatment to the CREATE-DOES construct, which is used to extend the language through new classes of intelligent data structures. FORTH Tools gives the reader an in-depth view of input and output, from reading the input stream to writing a simple mailing list program. Each topic is presented with practical examples and numerous illustrations. Problems (and solutions) are provided at the end of each chapter. FORTH Tools is the required textbook for the UCLA and IC Berkeley extension courses on FORTH. By Anita Anderson and Martin Tracy, 218 pages, 5¼x8¼, softbound.....$20.00

TTL Cookbook

Popular Sams author Dan Lancaster gives you a complete look at TTL logic circuits, the most inexpensive, most widely applicable form of electronic logic. In no-nonsense language, he spells out just what TTL is, how it works, and how you can use it. Many practical TTL applications are examined, including digital counters, electronic stopwatches, digital voltmeters, and digital tachometers. By Don Lancaster. 336 pages, 5½x8½, soft. ©1974.....$12.95

The Computer Journal

PO Box 1697 Kalispell, MT 59903

Order Date:_____

Print Name_____

Address_____

City_____ State_____ Zip_____

☐Check ☐Mastercard ☐Visa

Card No._____ Expires_____

Signature for Charge_____

Qty	Title	Price	Total
		Book Total	
		Shipping	
		TOTAL	

Shipping charges are: $1.00 for the first book, and $.50 for all subsequent books. Please allow 4 weeks for delivery.

THE COMPUTER CORNER

A Column by Bill Kibler

Well, so starts a new year and a new column. In the past year of writing for *The Computer Journal*, I have passed over many little topics and interesting tidbits. My recent articles on "tricks of the trade" were attempts to cover some of these topics, yet far too many words of wisdom never make it into print. Considering too, the many questions I receive from fellow computerists, there seems to be a need for a regular column.

As a contributing editor of *The Computer Journal* it will be my duty to answer your letters of inquiry when possible, as well as those I receive in some of my other activites. This will not stop the major articles on other topics but will allow you to see how I am doing with a project, and in fact, give you a chance to comment on it before completion. A major problem I face in writing articles about hardware is the long development time needed to prepare an article. I am currently working on a series of articles based around the Superbrain computer. Just gathering and sifting the data has taken several months. It is now possible to actually sit down and get started on writing the articles and making the changes I have in mind.

My primary work is with industrial computers, mainly those controlling process systems. Although these units are different than the normal personal computer, there are many facts and concepts that I come across which will be of interest to readers. One such area is the use of small systems running Forth for control applications. I am currently toying with building the Rockwell Forth system or making a Z80 Forth unit. In either case I am interested in others' experiences and in your comments. Having the Rockwell unit in my hands for one night was fun, but at the time I did not have all the documents I needed to do a write up on it.

Being somewhat of a purist, it has taken me some time to give up my 8" drives. Still, the price of new 5¼" drives has dropped so much that I must admit to shifting over to them. Now don't get me wrong—I still have an 8" disk system—but now most of my work is on minis. Is this trend important? I think so. Why? There are many things happening with computers these days, and most of them are not technical. The hardware is becoming the least important aspect of the system, and software is definitively the new challenge on the horizon. This change means a lack of available supplies for older systems. The industry is going where the most money is to be made, and the money is in minis, not maxis. It is getting harder to find 8" diskettes for under two dollars, but I can get 5's for a dollar even.

My Z100 computer has found a new home, and Gerry, the new owner, is finding out about all the little points I never had time to investigate. One complaint of mine was the absence of a configuration program. The problem concerns the ever-increasing size of BIOSs. These started out under 2K in length and now run several "K" long. The Z100's BIOS is in two parts under CP/M 85, and the MSDOS is several inches thick. When adding 8" drives or changing to non-standard units it will be necessary to patch the BIOSs. In the old days this was no problem, but now the Z100 is a nightmare and a half. The problem is not one of bringing out the control values into accessible tables. The sign of a good BIOS is that all of the parameters are located in one place, making patching and configuration programs possible. Users with ZDOS 1.0 will be pleased to see ZDOS 2.0 with a configuration program.

When dealing with different systems, I guess the most common problem for me is that of transferring data. My solution is Modem7 and its file transferring options. Running two systems and doing my work on 5's and then shipping it out on 8's has me using Modem7 all the time. When I was working at Micropro we had a program for our development systems that allowed one unit to be a slave to the other. Similar to BYE, this program caused the slave drives to become "C" and "D" drives. If somebody has written such a program, please let me know, as I haven't found a copy of the old one. Reinventing this program for generic CP/M systems is my next project, so let me know if you have any ideas on just such a program.

I spent the other day reading about CPNET and got some ideas on the transfer program. Seems Digital Research uses the BDOS calls to control their headers in packetting the data to transfer. This has got me thinking of doing some pushing of registers to create the data packet, and then just popping them and calling the BDOS entry point. This sounds simple until you sit down and start writing the code, but now I have a point to start from. There is also a HAM radio packet program on SIG/M disks that may shed more light on the subject. As I study the problem more, it appears that getting the data packet or format is the part that can cause the most problems.

The new year is here and with it the return of the swap meets. I went to my first one of the year last weekend, and was rather surprised at the change of products. Prices are down as many companies are going under and unloading their warehouses. Another change I've seen is the absence of S-100 boards, or at least a change in their quantity. In the past, S-100 was the most common product at swap meets, but single boards and hard disks are now taking up most of the spaces. After the weekend meet, I need to change my statement that it is possible to build a system for under $800—I think it is less than $500 now.

Well that's about it for this month. Next month should contain reports on tying systems together, some $80 minis, and what it is like being the editor of a local computer club newsletter. ■

Interfacing Tips and Troubles

A Column by Neil Bungard

This month I would like to diverge from my series of articles on interfacing tools to stress a point concerning *The Computer Journal*, and to show you an easier way to interface your Sinclair ZX81 computer.

There is so much information being generated in the area of computers that it is impossible for one person to keep up with it all. As an example, consider my recent articles on interfacing the Sinclair computers (*The Computer Journal*, Issues 13 and 14). In part one of this series I made the following statement: "The Sinclair machines do not support MMIO (Memory Mapped IO)." I made this statement because while investigating the capabilities of the Sinclair machines, I was unable to make the machines respond using MMIO. However, as a result of a letter from LED of Michigan (Issue 14), I must "happily" retract my statement concerning MMIO on the Sinclair ZX81. I say "happily" because using MMIO simplifies the task of interfacing the ZX81 considerably. The interfacing task is simplified because there are no machine language routines required, and the hardware problems associated with AIO do not occur when using MMIO. The only disadvantage of MMIO is that it is slower than AIO on the ZX81, but it is my experience that the speed limitations are not a problem in most applications.

The hardware trick for using MMIO, as explained in LED's letter, is to direct the MMIO operations into the ZX81's memory space between addresses 8192(D) and 16383(D) (the (D) denotes decimal values). In addition, when information is transferred to/from this memory space, a signal (logic 1) must be generated and placed on the ZX81's ROMCS edge connector (pin 23B). With these details taken care of, information can be transferred to/from an interface circuit using PEEK and POKE instructions directly from BASIC. Using MMIO eliminates the need to write BASIC routines to load machine language programs, allocate space for machine language routines in REM statements, determine how data will be passed from the machine language programs to BASIC, and work around crashes and masked bits, all of which were required when using AIO on the ZX81.

MMIO Hardware

The circuit required to accomplish MMIO with the ZX81 is shown in Figure 1. Address lines A13, A14, A15, and 3 gates (two "OR" gates and 1 "INVERTER") from ICs 1 and 5 are required to decode the memory space which is used for MMIO on the ZX81. The 3 gates from ICs 1 and 5 configure a decoder which outputs a logic 0 on pin 6 of IC 1 any time memory locations 8192 through 16383 are addressed. Pin 6 of IC1 is connected to the output enable (pin 1) of tristate buffer IC6.

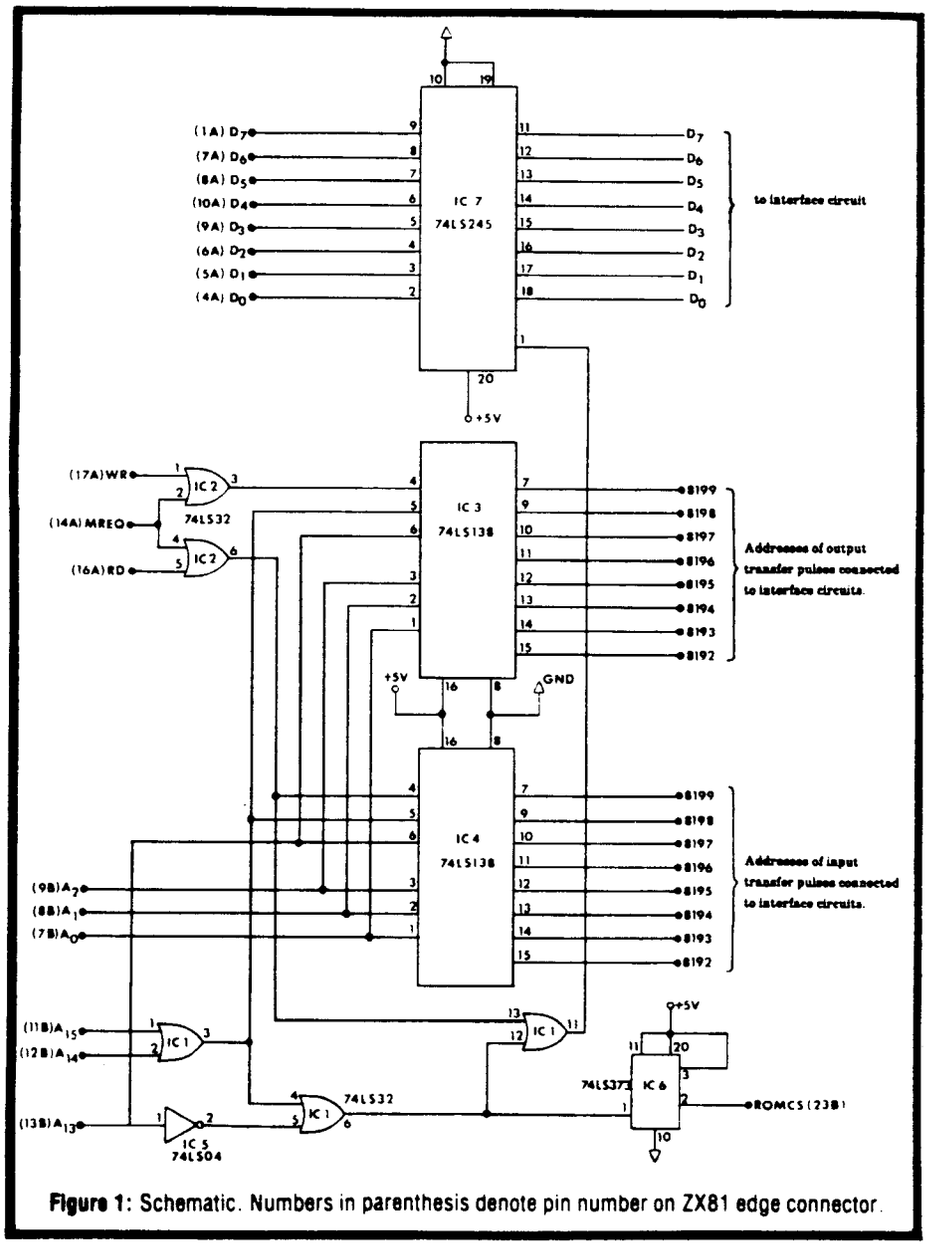

Figure 1: Schematic. Numbers in parenthesis denote pin number on ZX81 edge connector.

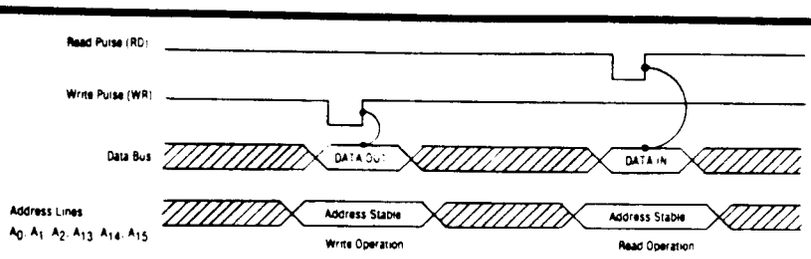

Figure 2: Timing Diagram of MMIO operations.

When pin 1 of IC6 is at a logic 0, the tristate buffer input (a logic 1 at pin 3) is connected through the buffer's output (pin 2) to the ZX81's ROMCS input. A logic 1 on the ROMCS input disables the ZX81's internal ROM, thus allowing MMIO operations to be accomplished into the 8192(D) to 16383(D) memory space.

Two 74LS138s (IC3 and IC4) generate 8 input and 8 output transfer pulses by decoding the ZX81's 3 lowest order address lines A0, A1, and A2. Address lines A0, A1, and A2 are connected to pins 1, 2, and 3 respectively of the 74LS138s and pins 5 and 6 of the 74LS138s additionally decode the address bus by detecting when the 8192(D) to 16383(D) memory space is being accessed. Timing of the transfer pulses is accomplished via a memory write (WR) signal and a memory read (RD) signal connected to pins 4 of ICs 3 and 4 respectively. Figure 2 shows the timing diagrams of the MMIO operations.

Information flows into (and out of) the ZX81 via an octal bus transceiver, IC7 in Figure 1. If address space 8192(D) through 16383(D) is accessed, and a memory read operation is being performed, pin 1 of IC7 will be at a logic 0, allowing data to be transferred into the ZX81. If address space 8192(D) through 16383(D) is accessed, and a memory write operation is being performed, pin 1 of IC7 will be at a logic 1, allowing data to be transferred out of the ZX81. The purpose of this octal bus transceiver is twofold. First of all, the transceiver isolates the ZX81 from the interface circuit, which would save the ZX81's internal circuitry if something went wrong on the interface circuit. Secondly, the transceiver will boost the ZX81's fanout. This means that more devices can be placed on the ZX81 data bus without loading the bus and causing current deficit problems.

MMIO Software

As mentioned earlier in this article, all information transfer between the ZX81 and an interface circuit can be accomplished from the BASIC language set using PEEK and POKE instructions. To accomplish MMIO using BASIC, you must first know where, within the 8192(D) to 16383(D) memory space, the interface circuit is actually mapped. When using the hardware configuration explained above, the 8 memory locations between 8192(D) and 16383(D) are used for input/output. Figure 3 shows which output pin on the 74LS138s will supply the correct transfer pulse when each of the 8 memory addresses are accessed. The software instructions which accomplish the MMIO are straightforward. To input data from an interface mapped into memory location 8192(D), you would use the following instruction:

LET APEEK (8192)

This instruction assigns the value obtained from the interface circuit (which will be a value between 0 and 255) to the variable name A. Likewise, to output data to an interface mapped into memory location 8192(D), you would use the following instruction:

POKE 8192,A

This instruction transfers the value previously assigned to the variable name A (a value between 0 and 255) to the interface circuit.

Input AddressPin # on IC3
PEEK 819215
PEEK 819314
PEEK 819413
PEEK 819512
PEEK 819611
PEEK 819710
PEEK 81989
PEEK 81997
Output AddressPin # on IC4
POKE 819215
POKE 819314
POKE 819413
POKE 819512
POKE 819611
POKE 819710
POKE 81989
POKE 81997

Figure 3

Conclusion

In conclusion, with memory mapped I/O and accumulator I/O now explained, the Sinclair ZX81 can be a very versatile computer for interfacing. AIO has its place where speed is a critical factor, as in applications where a number of values must be obtained in a second or less. But if your application requires acquisition times on the order of seconds or even greater, then MMIO offers you the simplicity to get your system working quickly and easily. As always, we appreciate your response to articles in *The Computer Journal* and look forward to hearing from you if you have questions or comments. ■

Classified

The Computer Journal will carry Classified Ads. The rate is $.25 per word. All Classified Ads must be paid in advance, and will be published in the next available issue. No checking copies or proofs are supplied, so please type your ad or print legibly.

Z sets you FREE!

Z — yes! Synergistic combination of ZCPR3 and ZRDOS2 produces flexible state-of-the-art Z80 operating system with tremendous productivity features.

Z-System consists of software modules, dynamic loading segments, and tools permitting optimum computer usage ranging from production program development to turnkey, password-controlled, end-user installations. Facilities include: multiple commands per line, file search paths, named directories, I/O redirection, command flow control, screen-oriented menu generators, complete housekeeping file and directory management, shells, alias (scripts) and nested-alias generation, and complete online help.

Seventy-six support utilities, five tool packages, and two application programs available now! Fully upward compatible with CP/M-80.

Z can now be purchased as auto-install program (Z-Com) or as manual-install ZCPR3 with semi-auto install ZRDOS package (Z-System). Our latest versions, to be released this year, support Zilog Z800 and Hitachi HD62801/64180 high-technology chips, chips run existing 8080 and Z80 programs!

Echelon eight-bit operating systems written in Assembly Language, using linkable macro subroutine libraries, offer performance paralleling best single-user 16/32-bit microcomputer systems.

1. **Z-Com** Full-up Z Operating System with input/output redirection running under CP/M-80, online command and utility documentation and help system **$219.95**

2. **Z-System** Manual-install ZCPR3 and ZRDOS2, easily tailored by programmer to custom needs; source code to core and utilities; similar to Item 1 ..... **$199.95**

3. **Z-Tools** Four software development system packages permitting advanced, structured program design, macro relocating assembler, linking loader, librarian, cross-reference generator, debugger, mnemonic and pseudo-op translators, and interactive disassembler. Super $315.00 package value **$200.00**

4. **DSD** Dynamic Screen Debugger offers high-level features never before found in microcomputers; simultaneous display of dual-memory segments, stack, cpu states, and flags, with software In-Circuit-Emulation **$149.00**

5. **The Libraries** Linkable ZCPR3 libraries (Vlib, Z3lib, and Syslib3) of over 400 subroutines used for Assembly Language program writing. Simplifies structured, efficient code production; online help system and full source code provided **$45.00**
Syslib3 alone **$29.00**

6. **Term3** New generation communication program permits menu control of computer/modem operations between operator and time-share services, bulletin-boards and other remote computer systems; auto-answer to command-line prompt **$99.00**

7. **Discat** Fancy file and disk catalog program running under Z-System, menu driven and easily customized by operator **$49.00**

Fortnighter newsletter, 24-hour BBS Z-Node System keep Z users informed of microcomputer happenings. Write or call for brochure or order now! State disk format desired; add $3.00 shipping & handling; Californians please add 6-1/2% sales tax. Visa/MC, check, money or purchase order accepted. (Program names are trademarks of their respective owners.)

Echelon, Inc.

101 First Street • Los Altos, California 94022 • 415/948-3820

ANNOUNCEMENTS

Artificial Intelligence Conference

The premiere Artificial Intelligence and Advanced Computer Technology Conference/Exhibition is scheduled for April 30, May 1 and 2, 1985, at the Long Beach Convention Center, Long Beach, California.

The exhibition showcases commercial and industrial applications of advanced computers and software. Technical experts will present a conference focusing on AI in automated manufacturing, office automation, medicine, robotics, business, training, microcomputers, aerospace, and graphic simulation. Other topics will be: fifth generation computers, natural language interfaces, expert systems-development systems, speech recognition, image processing, cognitive modeling, knowledge information processing, and AI languages including LISP and PROLOG.

Compete details are available from Tower Conference Management Co., 331 W. Wesley St., Wheaton, IL 60187, phone (312) 668-8100. ■

Computer Interfacing Workshop

Virginia Tech has announced a workshop on Personal Computer and STD Computer Interfacing for Scientific Instrument Automation. These courses, directed by David E. Larsen and Dr. Paul E. Field, will be held August 22, 23, and 24 in the Washington DC area, and September 19, 20, and 21 in Greensboro, NC. The cost is $450 for the three day session, and details can be obtained from Dr. Linda Leffel, C.E.C., Virginia Polytechnic Institute, Blacksburg, VA 24061, phone (703) 961-4848. ■

Universal RS-232 Data Acquisition

Elexor has announced their PL-100 intelligent peripheral which interfaces with any computer or terminal via a standard RS-232 serial port. It has 16 channels of 12 bit A/D, 2 channels of 12 bit D/A, 32 bits of digital I/O, 8K of ROM and 8K of RAM, plus provision for internal rechargeable batteries and two additional I/O boards. An on-board microprocessor supports simple ASCII

commands or internal BASIC interpreter. In addition, internal intelligence makes remote unattended applications possible using only a modem (no computer necessary).

Prices start at $549, and more information is available from Elexor Associates, PO Box 246, Morris Plains, NJ 07950, phone (201) 299-1615. ■

DSD80 Debugger

Soft Advances announces DSD80, a full screen symbolic debugging program for 8080, 8085 and Z80 microcomputers running CP/M-80 and compatible operating systems. The dynamic display has instruction, register, stack and two memory windows. The Z80 instruction set is fully supported using either extended Intel or Zilog mnemonics. DSD80 has on-line help and comes with a fifty page user's manual. The price is $125 plus shipping from Soft Advances, PO Box 49473, Austin, TX 78765, phone (512) 478-4763. ■

IBM-PC Data Acquisition Software

Data Translation has announced a series of application software packages to support its IBM-PC compatible data acquisition and control boards. These packages, intended for such applications as chromatography, physiological and speech research, materials testing, and industrial control, do not require the user to write original programs.

DT/Notebook is an integrated, menu driven software package for real time data acquisition, process control, data analysis, and graphic display. It performs data acquisition at up to 20,000 samples per second and real time graphic display of data at up to 600 samples per second.

DT/ILS-PC 1 is an interactive, command driven digital signal processing package which supports continuous data acquisition to disk at up to 27,500 samples per second.

ASYST is a command driven package for real time data acquisition and control, data analysis, and graphic displays able to acquire data at up to 27,500 samples per second. More information on these products and their analog I/O boards can be obtained from Shari L. Supernault at Data Translation, 100 Locke Drive, Marlboro, MA 01752, phone (617) 481-3700. ■

FREE CATALOG AND SIGNAL PROCESSING BOOKLET

CP/M MSDOS **AFFORDABLE ENGINEERING SOFTWARE** TRSDOS PCDOS

CIRCUIT ANALYSIS
- Fast Machine Code
- Complete Circuit Editor
- Free Format Input
- Worst Case/Sensitivities
- Full Error Trapping

ACNAP Version 2.0 $69.95
- Any Size Circuit
- Input / Output Impedances
- Monte Carlo Analysis
- Transients (with SPP)

DCNAP $59.95
- Compatible Data Files
- Calculates Component Power
- 30 Nodes / 200 Components

SIGNAL PROCESSING

SPP $59.95
- Linear/Non-Linear Analysis
- FFT/Inverse FFT
- La Place Transforms
- Transient Analysis
- Time Domain Manipulation
- Spectra Manipulation
- Transfer Function Manipulation
- Editing and Error Trapping
- Free Format Input
- ASCII and Binary Files
- Fast Machine Code

VISA ● MASTERCARD

GRAPH PRINTING
- Linear/Logarithmic
- Multiple Plots
- Full Plot Labeling
- Auto/Forced Scaling
- Two Y-Axes
- ACNAP/SPP Compatible

PLOT PRO $49.95
- Any Printer
- Vertical/Horizontal

PC PLOT $59.95
- Screen Graphics
- Pixel Resolution
- Epson Printer

BV Engineering
Professional Software 2200 Business Way, Suite 207 • Riverside CA 9[illegible] • USA (714) 781-0252

FAX-64 Listing 3, continued from page 25

```
1020 SYS 18205: REM SET COLORS
1030 POKE 53272,(PEEK(53272) OR 8)
1040 POKE 53265,(PEEK(53265) OR 32)
1050 IF MODE=0 THEN POKE 53270,8
1060 IF MODE=1 THEN POKE 53270,24
1070 POKE 56591,0: POKE 56579,0: POKE 56589,127
1080 GOTO 600
1090 PRINT"<CLR><DWN><DWN><DWN><DWN>     <RON>ENTER A NEW
   NAME FOR FILE<ROF>"
1100 FL=14-MODE*6: PRINT"    "FL"CHARACTERS MAXIMUM."
1110 F$="NONAME": INPUT"<DWN>     ";F$
1120 IF MODE>0 THEN: IF LEN(F$)<8 THEN F$=F$+" ": GOTO
    1120
1130 IF LEN(F$)>FL THEN F$=LEFT$(F$,FL)
1140 IF MODE=0 THEN F$="DD"+F$
1150 IF MODE=1 THEN F$=CHR$(129)+"PIC X "+F$
1160 CLOSE15: OPEN15,8,15
1170 PRINT"<DWN>     <RON>PUT DISK IN DRIVE 0, PRESS A
   KEY"
1180 GET K$: IF K$="" THEN 1180
1190 IF K$="Q" THEN 1290
1200 PRINT#15,"I0": GOSUB 1300: IF E<1 THEN 1250
1210 PRINT"<DWN>     <RON>PUT IN DISK NOW AND PRESS A KEY"
1220 GET K$: IF K$="" THEN 1220
1230 IF K$="Q" THEN 1290
1240 GOTO1200
1250 LL=LEN(F$): POKE18178,LL
1260 FOR IL=1TOLL: POKE 18178+IL, ASC(MID$(F$,IL,1)):
   NEXT IL
1270 SYS 18388: REM SAVE TO DISK FILE
1280 SC=0
1290 CLOSE7: CLOSE15: GOTO 180
1300 REM ERROR CHECK
1310 INPUT#15,E,E$,E2,E3
1320 IFETHENPRINT"        ***"E$"***"
1330 RETURN
1340 IF SC>0 THEN 1360
1350 POKE52,160: POKE56,160: POKE644,160: CLR: END
1360 PRINT"<DWN><RON>YOU HAVE NOT SAVED THE LAST PICTURE."
1370 PRINT"<DWN><RON>DO YOU WANT TO QUIT?": K$="N"
1380 PRINT"<DWN>ENTER <Q> TO QUIT ";:INPUT K$
1390 IF K$="Q" THEN 1350
1400 GOTO 180
1410 PRINT"<CLR><BLU><DWN><DWN><DWN><DWN>": POKE 53280,
   7: POKE 53281,1: RETURN
READY.
```

Back Issues Available:

Ordering Information: Back issues of The Computer Journal are $3.25 in the U.S. Canada, and $5.50 in other countries (air mail postage included). Send your complete name and address with payment to The Computer Journal, PO Box 1697, Kalispell, MT 59903. Please allow three to four weeks for delivery.

Volume 1, Number 1 (Issue #1):
- *The RS-232-C Serial Interface, Part One*
- *Telecomputing with the Apple][: Transferring Binary Files*
- *Beginner's Column, Part One: Getting Started*
- *Build an "Epram"*

Volume 1, Number 4 (Issue #4):
- *Optoelectronics, Part One: Detecting, Generating, and Using Light in Electronics*
- *Multi-user: An Introduction*
- *Making the CP/M User Function More Useful*
- *Build a Hardware Print Spooler, Part Three: Enhancements*
- *Beginner's Column, Part Three: Power Supply Design*

Volume 2, Number 1 (Issue #5):
- *Optoelectronics, Part Two: Practical Applications*
- *Multi-user: Multi-Processor Systems*
- *True RMS Measurements*
- *Gemini-10X: Modifications to Allow both Serial and Parallel Operation*

Volume 2, Number 2 (Issue #6):
- *Build a High Resolution S-100 Graphics Board, Part One: Video Displays*
- *System Integration, Part One: Selecting System Components*
- *Optoelectronics, Part Three: Fiber Optics*
- *Controlling DC Motors*
- *Multi-User: Local Area Networks*
- *DC Motor Applications*

Volume 2, Number 3 (Issue #7):
- *Heuristic Search in Hi-Q*
- *Build a High-Resolution S-100 Graphics Board, Part Two: Theory of Operation*
- *Multi-user: Etherseries*
- *System Integration, Part Two: Disk Controllers and CP/M 2.2 System Generation*

Volume 2, Number 4 (Issue #8):
- *Build a VIC-20 EPROM Programmer*
- *Multi-user: CP/Net*
- *Build a High-Resolution S-100 Graphics Board, Part Three: Construction*
- *System Integration, Part Three: CP/M 3.0*
- *Linear Optimization with Micros*
- *LSTTL Reference Chart*

Volume 2, Number 5 (Issue #9):
- *Threaded Interpretive Language, Part One: Introduction and Elementary Routines*
- *Interfacing Tips and Troubles: DC to DC Converters*
- *Multi-user: C-NET*
- *Reading PCDOS Diskettes with the Morrow Micro Decision*
- *LSTTL Reference Chart*
- *DOS Wars*
- *Build a Code Photoreader*

Volume 2, Number 6 (Issue #10):
- *The FORTH Language: A Learner's Perspective*
- *An Affordable Graphics Tablet for the Apple][*
- *Interfacing Tips and Troubles: Noise Problems, Part One*
- *LSTTL Reference Chart*
- *Multi-user: Some Generic Components and Techniques*
- *Write Your Own Threaded Language, Part Two: Input-Output Routines and Dictionary Management*
- *Make a Simple TTL Logic Tester*

Volume 2, Number 7 (Issue #11):
- *Putting the CP/M IOBYTE To Work*
- *Write Your Own Threaded Language, Part Three: Secondary Words*
- *Interfacing Tips and Troubles: Noise Problems, Part Two*
- *Build a 68008 CPU Board For the S-100 Bus*
- *Writing and Evaluating Documentation*
- *Electronic Dial Indicator: A Reader Design Project*

Volume 2, Number 8 (Issue #12):
- *Tricks of the Trade: Installing New I/O Drivers in a BIOS*
- *Write Your Own Threaded Language, Part Four: Conclusion*
- *Interfacing Tips and Troubles: Noise Problems, Part Three*
- *Multi-user: Cables and Topology*
- *LSTTL Reference Chart*

Volume 2, Number 9 (Issue #13):
- *Controlling the Apple Disk][Stepper Motor*
- *Interfacing Tips and Troubles: Interfacing the Sinclair Computers, Part One*
- *RPM vs ZCPR: A Comparison of Two CP/M Enhancements*
- *AC Circuit Anaysis on a Micro*
- *BASE: Part One in a Series on How to Design and Write Your Own Database*
- *Understanding System Design: CPU, Memory, and I/O*

Issue Number 14:
- *Hardware Tricks*
- *Controlling the Hayes Micromodem II From Assembly Language*
- *S-100 8 to 16 Bit RAM Conversion*
- *Time-Frequency Domain Analysis*
- *BASE: Part Two*
- *Interfacing Tips and Troubles: Interfacing the Sinclair Computers, Part Two*

Issue Number 15:
- *Interfacing the 6522 to the Apple][and][e*
- *Interfacing Tips and Troubles: Building a Poor-Man's Logic Analyzer*
- *Controlling the Hayes Micromodem II From Assembly Language, Part Two*
- *The State of the Industry*
- *Lowering Power Consumption in 8" Floppy Disk Drives*
- *BASE: Part Three*

Issue Number 16:
- *Debugging 8087 Code*
- *Using the Apple Game Port*
- *BASE: Part Four*
- *Using the S-100 Bus and the 68008 CPU*
- *Interfacing Tips and Troubles: Build a "Jellybean" Logic-to-RS232 Converter*

Issue Number 17:
- *Poor Man's Distributed Processing*
- *Base: Part Five*
- *FAX-64:Facsimile Pictures on a Micro*
- *The Computer Corner*
- *Interfacing Tips and Troubles: Memory Mapped I/O on the ZX81*